






IP 30

230V  
50Hz

G13



| Type          | Light source     | Light source power / lamp base | Weight |
|---------------|------------------|--------------------------------|--------|
| DAP 23 - 2180 | fluorescent lamp | 2 x 18 W / G 13                | 3,5 kg |
| DAP 23 - 2360 |                  | 2 x 36 W / G 13                | 5,7 kg |

**Application**  
passage ways, cabins, lounges, dining rooms, accomodation areas  
**Approvals**  
according to the rules of relevant classification societies, additional IEC

**Housing**  
zinc coated steel, powder coated white  
**Diffuser**  
polycarbonate opal  
**Lamps (not included)**  
fluorescent lamp 18W/36W

**Electric**  
flexible wiring heat resistant up to +105°C  
**Cable entry**  
4 inlets, cable ø max 11 mm  
**Mounting**  
4 mounting holes ø7mm  
**Electrical connection**  
see finish section

OPTIONS

220V-230V  
60Hz

120V  
60Hz

240V  
50Hz

24V DC

Electronic Ballast

220V-240V  
AC/DC

110V-240V  
AC/DC

Dimmable Electronic Ballast


220V-240V  
50Hz-60Hz

Battery Backup System

220V-240V  
50Hz-60Hz

3h


Emergency Lampholder B15d

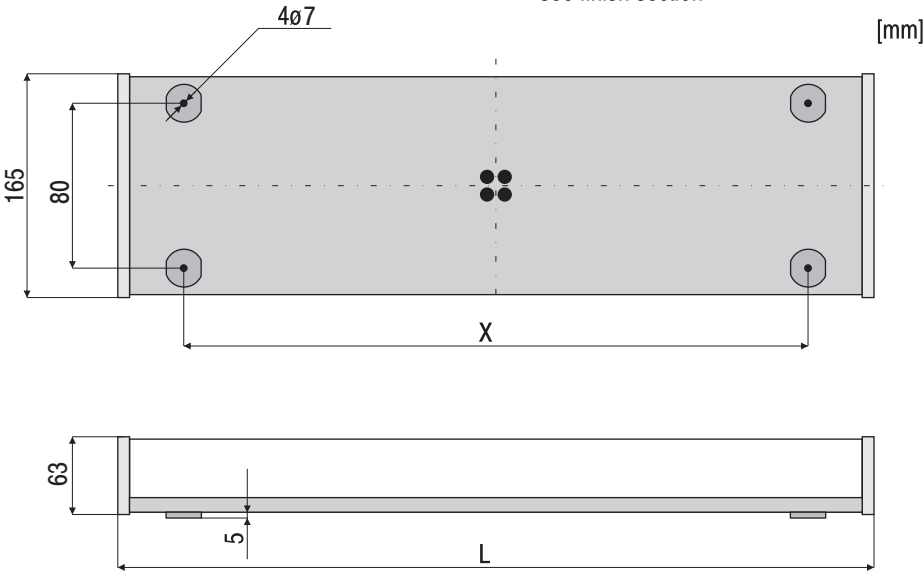

| Type         | L    | X    |
|--------------|------|------|
| DAP 23/2x18W | 629  | 450  |
| DAP 23/2x36W | 1252 | 1059 |



## Order Specification

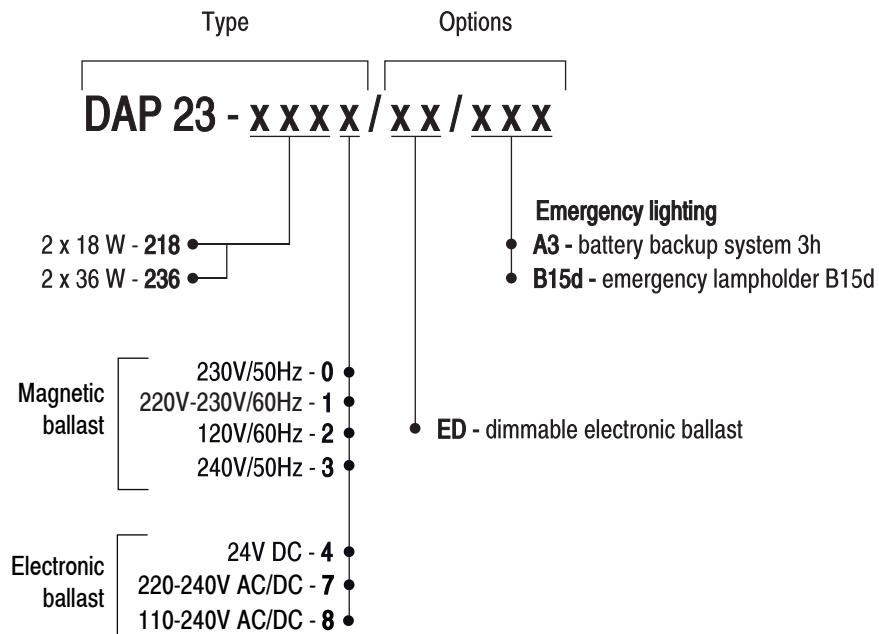

### Example of type description

**DAP 23 - 2180** light fitting for two fluorescent lamp 18W with socket G13; supply voltage 230V/50Hz;