



Ceiling Luminaire, recessed, 2x18W/2x36W

DEP 16



IP 44

**230V
50Hz**

G13

Type	Light source	Light source power / lamp base	Weight
DEP 16 - 2180	fluorescent lamp	2 x 18 W / G 13	3,3 kg
DEP 16 - 2360		2 x 36 W / G 13	6,4 kg

Application

passage ways, cabins, lounges, dining rooms, accommodation areas

Approvals

according to the rules of relevant classification societies, additional IEC

Protection class

IP 44 in conjunction with ceiling

Housing

zinc coated steel, powder coated white

Diffuser

polycarbonate, opal

Lamps (not included)

fluorescent lamp 18W/36W

Electric

flexible wiring, heat resistant up to +105°C

Cable entry

4 inlets, cable ø max 11 mm


Mounting

4 mounting holes, ø 5.5 mm, cut out



18W, 635 x 250 mm,
36W, 1245 x 250 mm

Electrical connection
see finish section

3.05

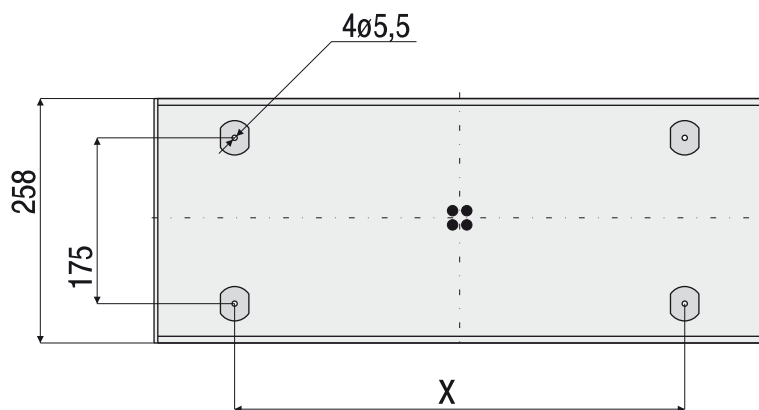

[mm]

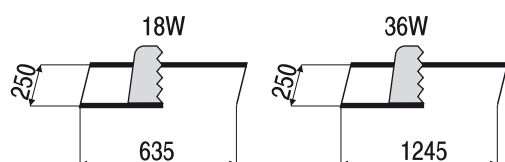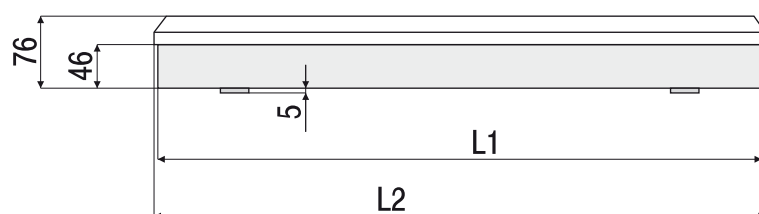

Type	L1	L2	X
DEP 16/2x18W	633,5	645	475
DEP 16/2x36W	1243,5	1255	950

OPTIONS

**220V
60Hz**

**230V
60Hz**

**120V
60Hz**

**240V
50Hz**

24V DC

Electronic Ballast

220V-240V
50Hz-60Hz

220V-240V
DC

Dimmable Electronic Ballast

220V-240V
50Hz-60Hz

Battery Backup System

220V-240V
50Hz-60Hz

1h or 3h


Emergency Lampholder B15d

Antimagnetic

B0
Execution



Order Specification

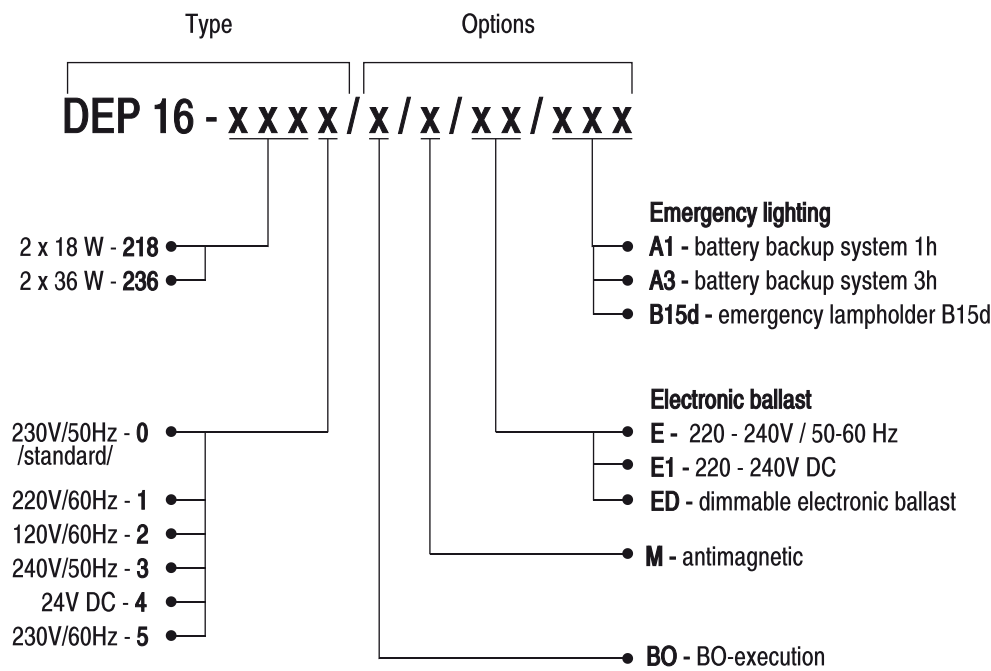

Example of type description

DEP 16 - 2180 light fitting for two fluorescent lamp 18W with socket G13; supply voltage 230V/50Hz;

3.06

Spare parts for ceiling luminaire DEP 16 - 2180

No.	Spare parts	Part-no.
1	Diffuser PC, opal	101 00 16218
2	Lampholder G 13 /4 pcs./	014 00 16218
3	Ballast /2 pcs./	032 00 16218
4	Capacitor	021 00 16218

Spare parts for ceiling luminaire DEP 16 - 2360

No.	Spare parts	Part-no.
1	Diffuser PC, opal	101 00 16236
2	Lampholder G 13 /4 pcs./	014 00 16236
3	Ballast /2 pcs./	032 00 16236
4	Capacitor	021 00 16236