





Ceiling Luminaire, recessed, 2x18W, 2x36

DEP 19



IP 20

IP 44

230V
50Hz

G13



Type	Light source	Light source power / lamp base	Weight
DEP 19 - 2180	fluorescent lamp	2 x 18 W / G 13	4,2 kg
DEP 19 - 2360	fluorescent lamp	2 x 36 W / G 13	5,2 kg

Application

accommodation areas, passage ways, cabins, etc.

Approvals

according to the rules of relevant classification societies, additional IEC

Housing

zinc coated steel, powder coated white

Cover

diffuser made of PC opal or aluminium-louvre silver

Lamps (not included)

fluorescent lamp 18W,36W

Electric

flexible wiring, heat resistant up to +105°C

Cable entry

2 plastic inlets, cable max ø 11 mm

Type of Ceiling

I strip ceiling - produced by FAMOS

II panel ceiling - produced by FAMOS,LUBMOR

III tile ceiling - produced by FAMOS,LUBMOR

Mounting

4 mounting holes or special bracket ordered separately


Electrical connection

see finish section


3.07

Drawing 1


Type I

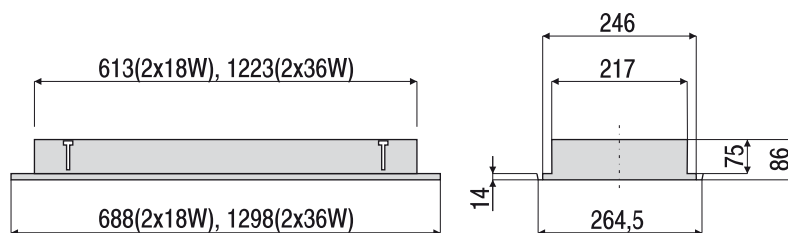

Type II

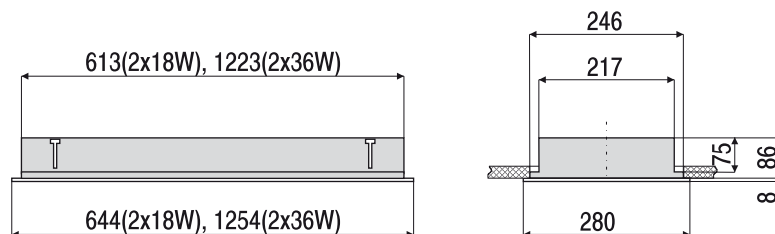

Type III

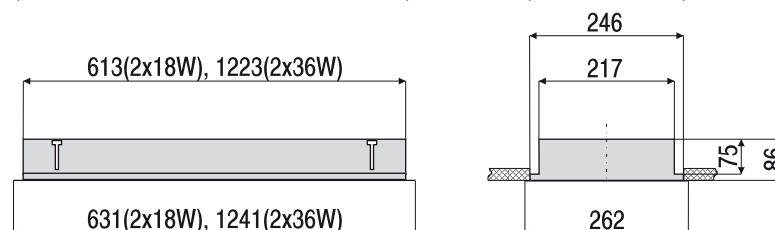

OPTIONS

220V
60Hz

230V
60Hz

120V
60Hz

240V
50Hz

24V DC

Electronic Ballast

220V-240V
50Hz-60Hz

220V-240V
DC

Dimmable Electronic Ballast

220V-240V
50Hz-60Hz

Battery Backup System

220V-240V
50Hz-60Hz

1h or 3h


Emergency Lampholder B15d

Different Diffuser


Antimagnetic

Red Filter

Emergency Lampholder B15d




Order Specification

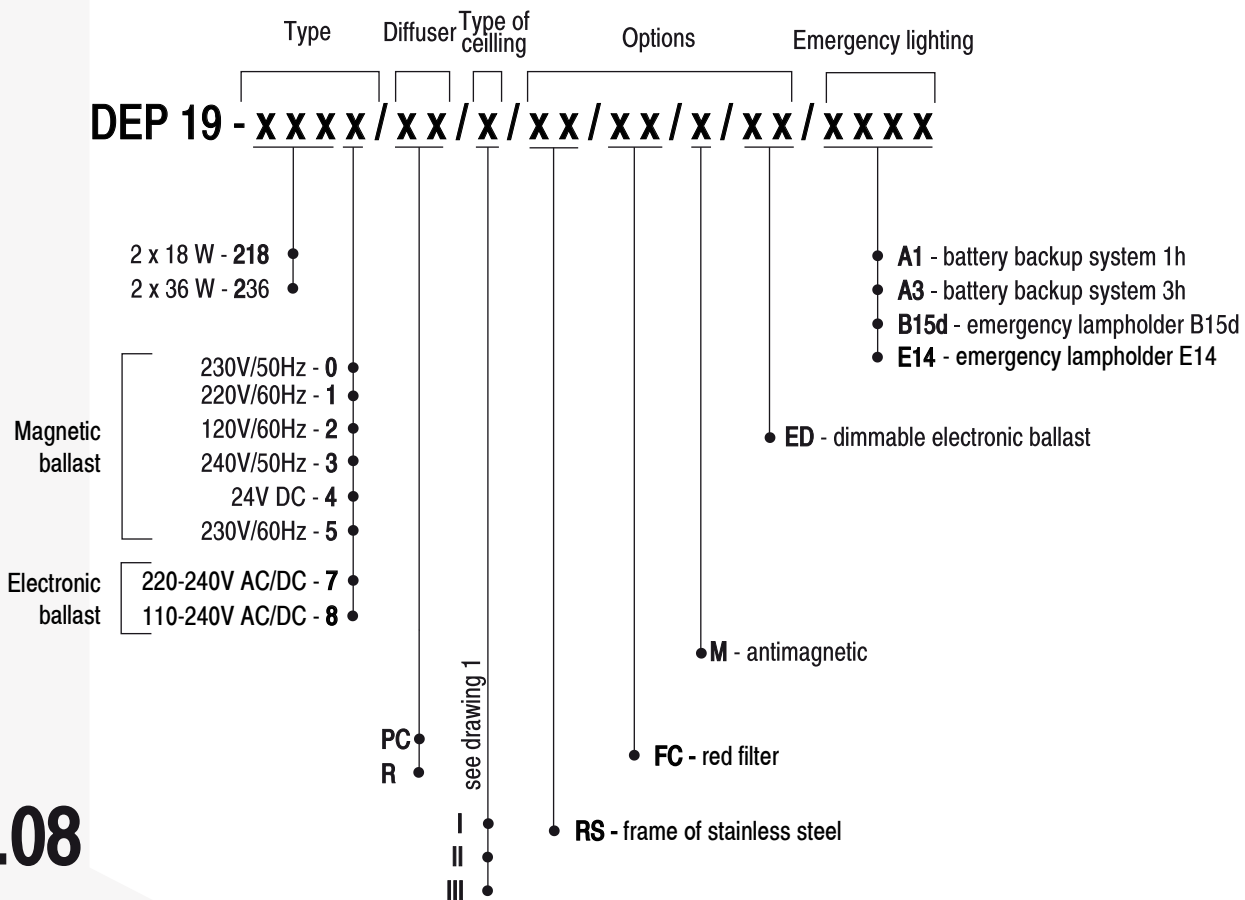


Example of type description

DEP 19 - 2180/PCI light fitting for two fluorescent lamp 18W with socket G13; supply voltage 230V/50Hz; diffuser - PC opal; type of ceiling - I strip ceiling (produced by FAMOS), mounting - 4 mounting holes (type A)



Drawing 2

Mounting

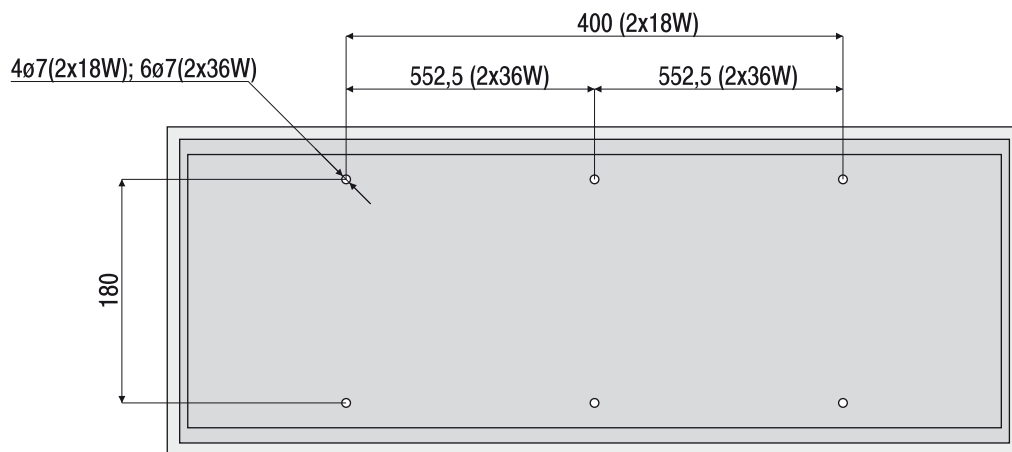

Additional equipment

31-319-9601 Special bracket type C /ordered separately/

