





Ceiling Luminaire, recessed, 2x7W/2x9W/1x60W

DEP 35



IP 44

**230V
50Hz**

G23



E27



Type	Code	Light source	Light source power / lamp base	Weight
DEP 35 - 2070	335 - 207	tubular compact fluorescent lamp	2 x 7 W / G 23	1,8 kg
DEP 35 - 2090	335 - 209		2 x 9 W / G 23	1,8 kg
DEP 35 - 1060	335 - 160	incandescent lamp	1 x 60 W / E 27	0,9 kg

Application

cabins, lounges, dining rooms, accommodation areas, bath rooms

Approvals

according to the rules of relevant classification societies, additional IEC

Protection class

IP 44 in conjunction with ceiling

Housing

zinc coated steel, powder coated white

Diffuser

polycarbonate, opal

Fascia

gold, silver, white

Lamps (not included)

incandescent lamp max 60W or tubular compact fluorescent lamp 7W/9W

Electric

flexible wiring, heat resistant up to +105°C

Cable entry

1 inlet, cable $\varnothing$ max 11 mm

Mounting




8 mounting holes, $\varnothing$ 4 mm

Electrical connection

see finish section

3.01

[mm]

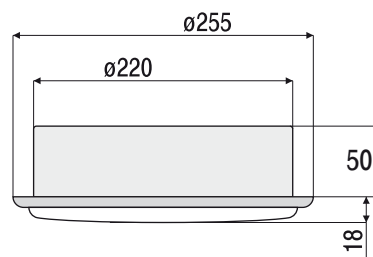

OPTIONS

**220V
60Hz**

**230V
60Hz**

**120V
60Hz**

**240V
50Hz**

24V DC

**Electronic
Ballast**

**220V-240V
50Hz-60Hz**

**220V-240V
DC**


**Battery
Backup
System**

**220V-240V
50Hz-60Hz**

1h or 3h



Order Specification

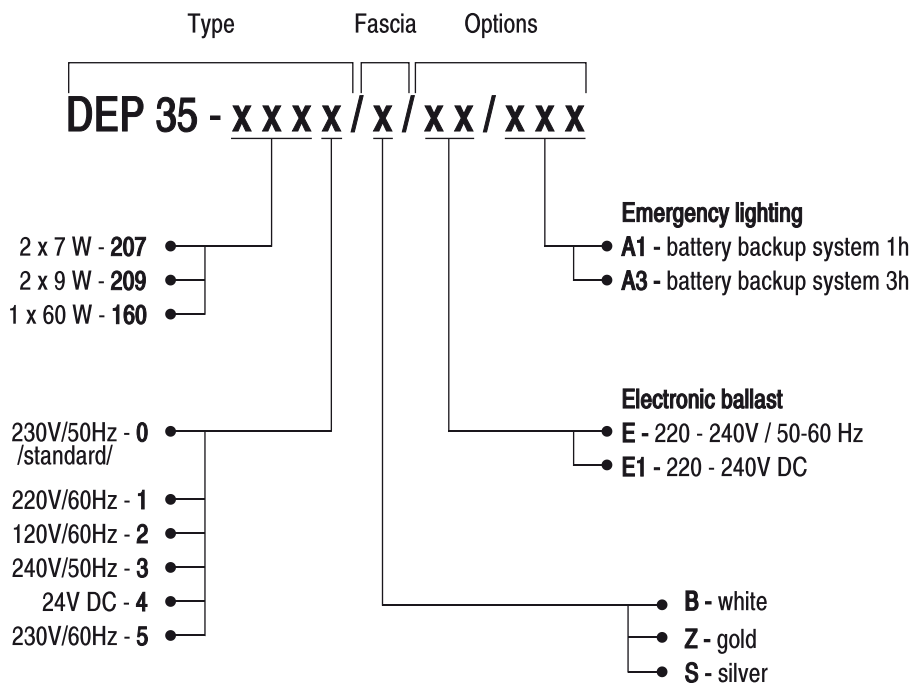

Example of type description
DEP 35 - 2070/B light fitting for tubular compact fluorescent lamp 7W with socket G23; supply voltage 230V/50Hz; fascia - white

Spare parts for ceiling luminaire DEP 35

No.	Spare parts	Part-no.
1	Diffuser PC, opal	101 00 35000
2a	Lampholder G 23 /2 pcs./	012 00 35000
2b	Lampholder E 27 /1 pcs./	011 01 35000
3	Ballast /2 x 7 W/	031 00 35207
4	Ballast /2 x 9 W/	031 00 35209
5a	Fascia gold	701 02 35000
5b	Fascia silver	701 01 35000
5c	Fascia white	701 00 35000