





IP 20

230V
50Hz

G13



Type	Light source	Light source power / lamp base	Weight
DEP 95 - 2180	fluorescent lamp	2 x 18 W / G 13	4,9 kg
DEP 95 - 2360		2 x 36 W / G 13	8,1 kg

Application
for installation in Dampa ceilings M300 passage ways, cabins, lounges, dining rooms, accomodation areas

Approvals
according to the rules of relevant classification societies, additional IEC

Housing
zinc coated steel, powder coated white

Diffuser
parabolic louvre, silver

Lamps (not included)
fluorescent lamp 18W/36W

Electric
flexible wiring, heat resistant up to +105°

Cable entry
2 or 4 cable inlets cable ø max 11mm

Mounting
2 mounting brackets

Electrical connection
see finish section

3.12

OPTIONS

220V
60Hz

230V
60Hz

120V
60Hz

240V
50Hz

24V DC

Electronic Ballast

220V-240V
50Hz-60Hz

220V-240V
DC

Dimmable Electronic Ballast

220V-240V
50Hz-60Hz

Battery Backup System

220V-240V
50Hz-60Hz


1h or 3h

Emergency Lampholder B15d

Red Filter

Different Diffuser


Antimagnetic

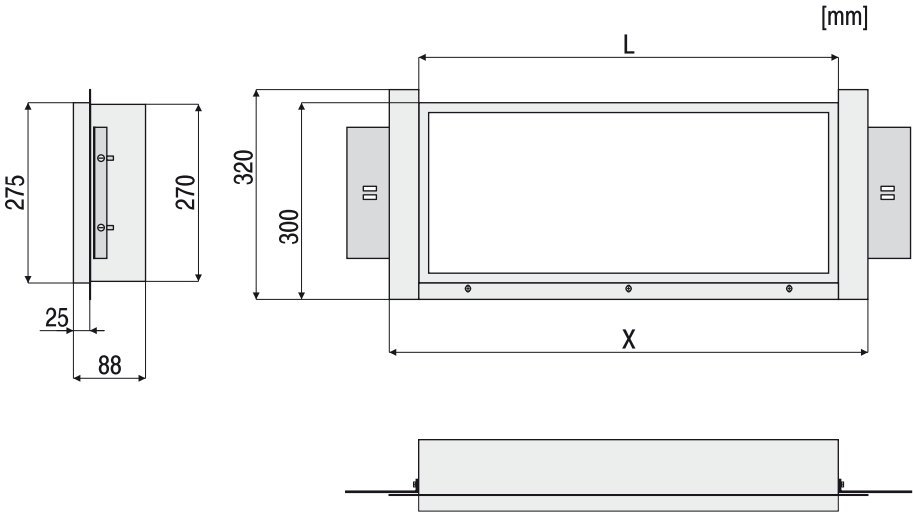

Type	L	X
DEP 95/2x18W	640	730
DEP 95/2x36W	1250	1340



Order Specification

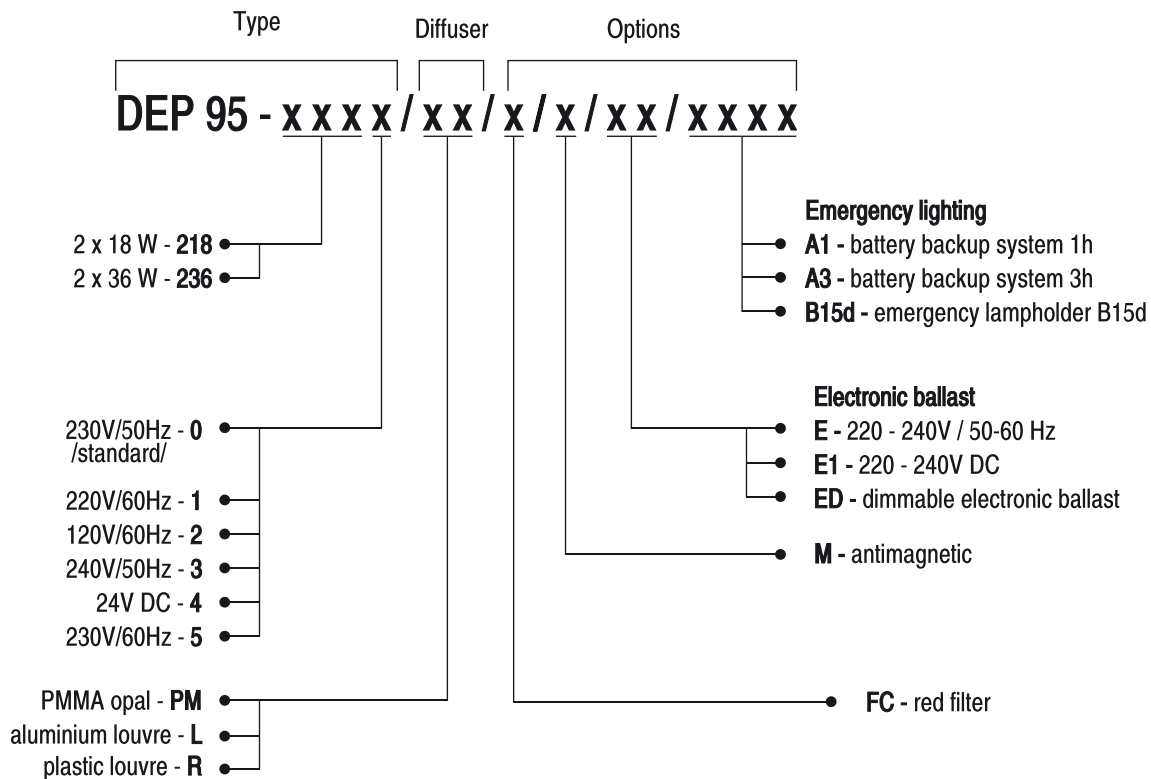

3.13

Example of type description

DEP 95 - 2180/PM light fitting for two fluorescent lamp 18W with socket G13; supply voltage 230V/50Hz;
diffuser - PMMA opal

Spare parts for ceiling luminaire DEP 95 - 2180

No.	Spare parts	Part-no.
1	Parabolic louvre, silver	101 00 95218
2	Lampholder G 13 /4 pcs./	014 00 95218
3	Ballast /2 pcs./	032 00 95218
4	Capacitor	021 00 95218

Spare parts for ceiling luminaire DEP 95 - 2360

No.	Spare parts	Part-no.
1	Parabolic louvre, silver	101 00 95236
2	Lampholder G 13 /4 pcs./	014 00 95236
3	Ballast /2 pcs./	032 00 95236
4	Capacitor	021 00 95236