



Downlight, 1x7W / 1x12W

DLP 38 MLED

IP 44

220-240V
AC/DC

LED



Type	Wattage (panel)	Wattage with supply unit	Weight	Panel typical luminous flux
DLP 38-MLED 170/107/...	1 x 7 W	LED	1,3 KG	980 lm (3000K)
DLP 38-MLED 170/112/...	1 x 12 W	LED	1,3 KG	1370 lm (3000K)

Application

Cabins, lounges, dining rooms, accommodation rooms etc.

Approvals

According to the rules of relevant classification societies, additional IEC

Housing

Galvanized steel, powder coated white

Cover


Diffuser made of PC opal with decorative ring is an integral part of luminaire but must be ordered separately

Cable entry


3/5 pole plug and socket

Mounting

max 6 mounting holes, cut out: 144 mm

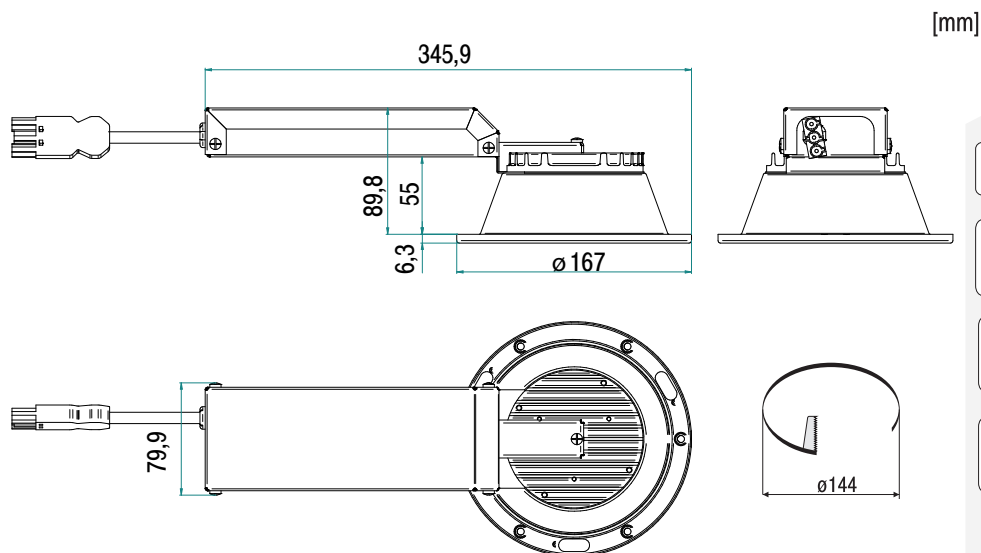

Emergency version (dimensions of luminaire)



OPTIONS

Battery Backup System 3h

Power Supply 120V AC 24V DC

Dimmable Version 1-10V

Order Specification

	Power	Supply voltage	Colour Temp.	Options
DLP 38 MLED 170	/ x x x	/ x	/ x x x	/ x x x
	7W - 107			
	12W - 112			
	24V DC - 4			
	220-240V AC/ DC - 7			
	120V AC/DC - 9			
			3000K - 830	
			4000K - 840	
				- ED - dimmable version 1-10V* - A3 - battery backup system 3h** (unit in external box)

*dimmable version is suitable only with AC current

Example of type description

DLP 38 MLED 170/112/7/830 light fitting with LED source 12W; supply voltage 220-240V AC/DC; colour temp 3000K;


Decor ring with diffuser is an integral part of luminaire but must be ordered separately



LD - SROP (silver ring, opal PC) ordering index: 31-339-9061

LD - WROP (white ring, opal PC) ordering index: 31-339-9060

Coloured ring with RAL on special request: LD - RAL
ordering index: 31-339-9062



LD - WRRF (white ring, red filter) ordering index: 31-339-9066

LD - SRRF (silver ring, red filter) ordering index: 31-339-9067

Coloured ring with RAL on special request: LD - RAL RF
ordering index: 31-339-9068