







IP 20

230V
50Hz

G13



Type	Light source	Light source power / lamp base	Weight
ELP 12 - 1150	fluorescent lamp	1 x 15 W / G 13	0,9 kg
ELP 12 - 1180		1 x 18 W / G 13	1,0 kg
ELP 12 - 1300		1 x 30 W / G 13	1,1 kg
ELP 12 - 1360		1 x 36 W / G 13	1,2 kg

Application
passage ways, cabins, shops
Approvals
according to the rules of relevant
classification societies, additional IEC
Housing
zinc coated steel, powder coated white

Lamps (not included)
fluorescent lamp 15W/18W/30W/36W
Electric
flexible wiring
heat resistant up to +105°C

Cable entry
2 inlets, cable ø max 11 mm
Mounting
2 mounting holes ø 5 mm
Electrical connection
see finish section

4.09

[mm]

OPTIONS

220V
60Hz

230V
60Hz

120V
60Hz





240V
50Hz

Electronic
Ballast


220V-240V
50Hz-60Hz

220V-240V
DC


Diffuser
Polycarbonate

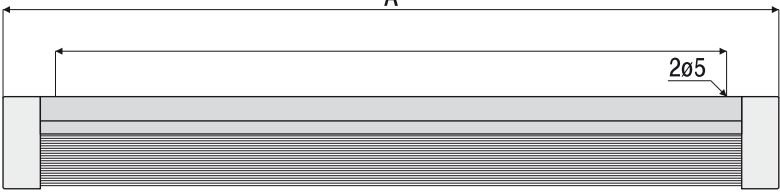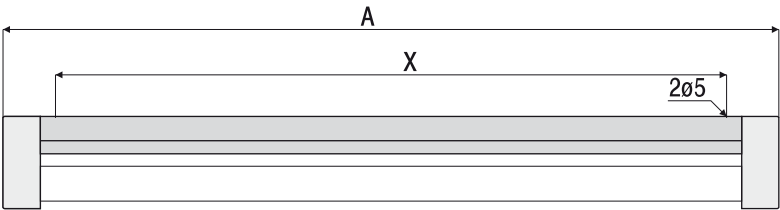

Type	A	X
ELP 12/1x15W	471	404
ELP 12/1x18W	623	559
ELP 12/1x30W	928	864
ELP 12/1x36W	1232	1169
ELP 12/1x58W	1532	1468



Order Specification

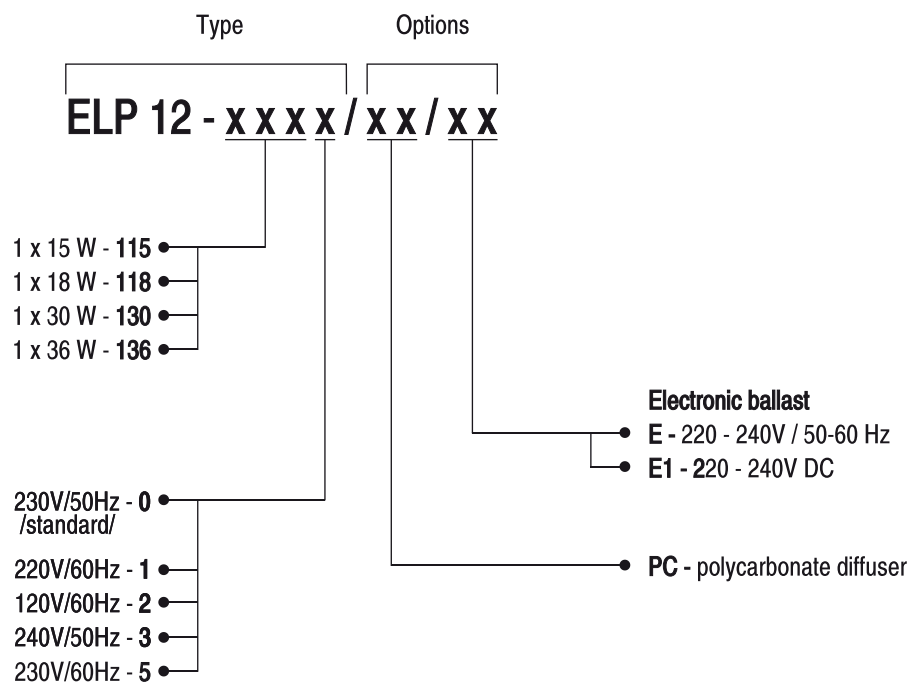

Example of type description
ELP 12 - 1180 light fitting for one fluorescent lamp 18W with socket G13; supply voltage 230V/50Hz

4.10

Spare parts for batten luminaire ELP 12 - 1180

No.	Spare parts	Part-no.
1	Lampholder G 13 /4 pcs./	012 00 12118
2	Ballast	031 00 12118
3	Capacitor	021 00 12118

Spare parts for batten luminaire ELP 12 - 1360

No.	Spare parts	Part-no.
1	Lampholder G 13 /2 pcs./	012 00 12136
2	Ballast	031 00 12136
3	Capacitor	021 00 12136