

ELP 33 MLED

Cornice Luminaire, surface,
2x5W; 2x9W LED



IP 30

220-240V
AC/DC

LED



Type	Wattage	Light Source	Weight	Luminaire light flux	Equivalent
ELP 33 -MLED220/205/...	2 x 5 W	LED	3,5 KG	1215 lm	2x18W (T8); 2x14W (T5)
ELP 33 -MLED220/209/...	2 x 9 W	LED	3,5 KG	2460 lm	2x36W (T8); 2x28W (T5)

Application
passage ways, cabins
Approvals
according to the rules of relevant
classification societies, additional IEC

Housing
zinc coated steel, powder coated white
Diffuser
polycarbonate opal
Electric
flexible wiring, heat resistant
up to +105°C

Cable entry
2 inlets, cable ø max 11 mm
Mounting
4 mounting holes, ø 5.5 mm

OPTIONS


120V
AC

Dimmable

2-Pole
Switch


Emergency
mode 24V

Battery
Backup
System 3h

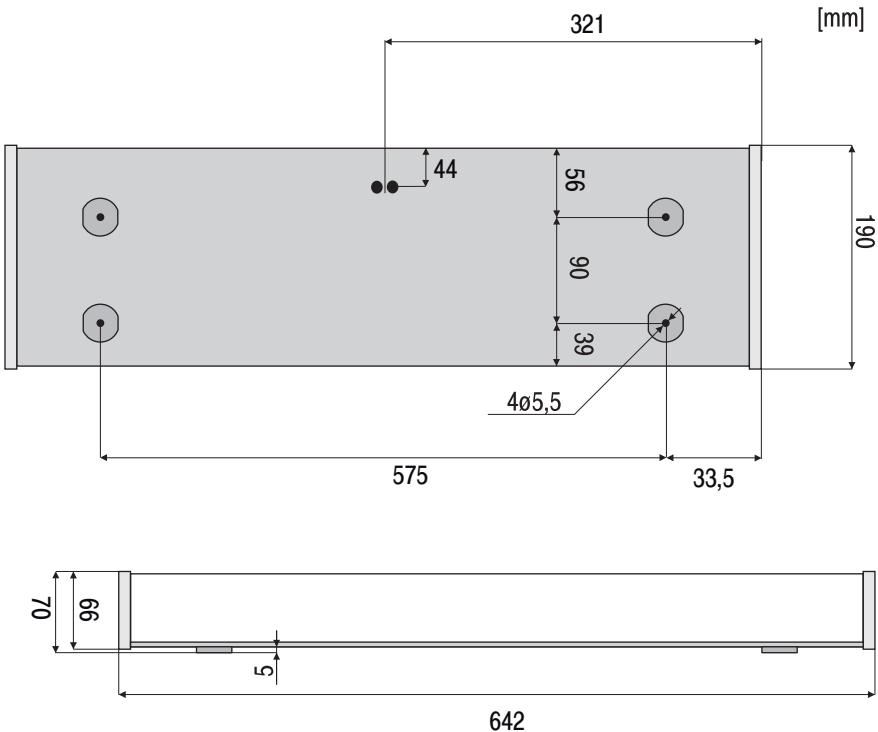



Order Specification

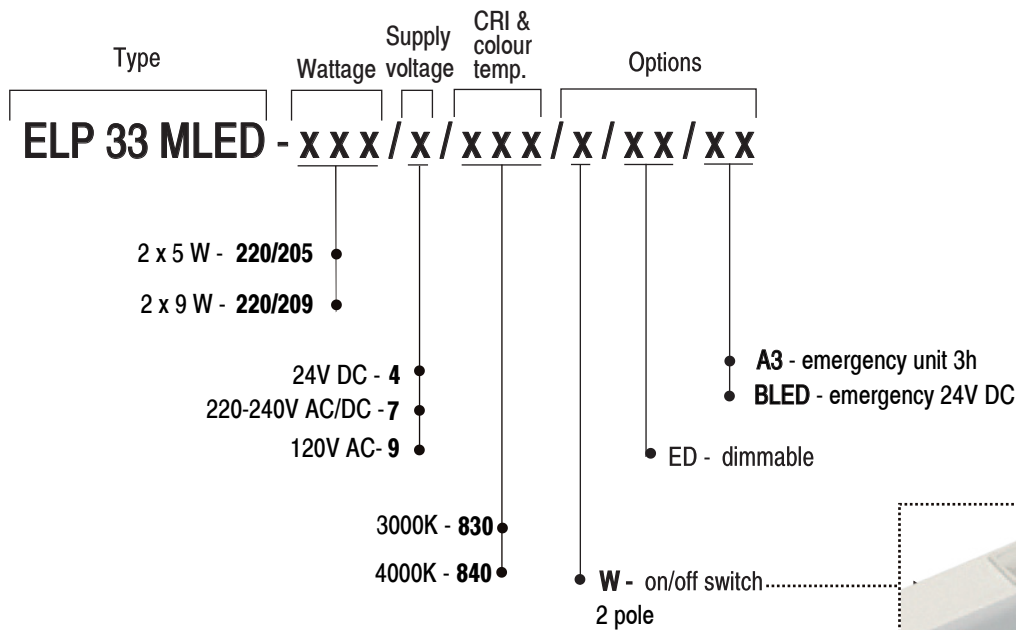

Example of type description

ELP 33 MLED220/205/7/840/W light fitting with LED source, 2x5W, supply voltage 220V-240V AC/DC, CRI 80, colour temperature 4000K, on/off switch