








IP 30

230V
50Hz

G13



Type	Light source	Light source power / lamp base	Weight
ELP 33 - 1180	fluorescent lamp	1 x 18 W / G 13	3,0 kg
ELP 33 - 2180		2 x 18 W / G 13	3,4 kg
ELP 33 - 1360		1 x 36 W / G 13	4,2 kg
ELP 33 - 2360		2 x 36 W / G 13	4,7 kg

Application
passage ways, cabins
Approvals
according to the rules of relevant
classification societies, additional IEC

Housing
zinc coated steel, powder coated white
Diffuser
polycarbonate opal
Lamps (not included)
fluorescent lamp 18W/36W
Electric
flexible wiring, heat resistant
up to +105°C

Cable entry
4 inlets, cable ø max 11 mm
Mounting
4 mounting holes, ø 5.5 mm
Electrical connection
see finish section

4.11

OPTIONS

220V
60Hz

230V
60Hz

120V
60Hz

240V
50Hz

Electronic Ballast 220V-240V 50Hz-60Hz 220V-240V DC


Dimmable Electronic Ballast 220V-240V 50Hz-60Hz

Battery Backup System 220V-240V 50Hz-60Hz 1h or 3h


Emergency Lampholder B15d

2-Pole Switch

Crystal Diffuser

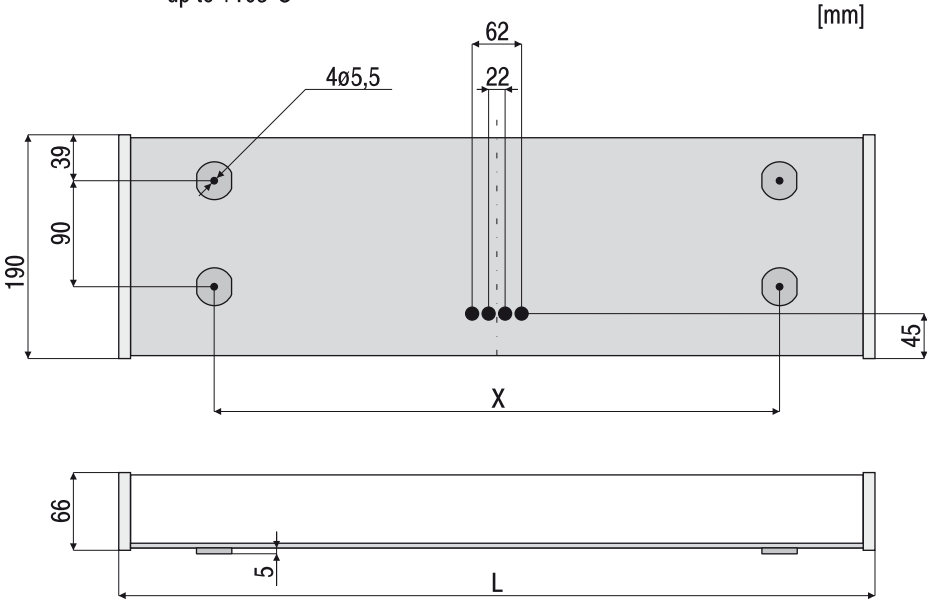


Type	L	X
ELP 33/2x18W	642	480
ELP 33/2x36W	1252	967



Cornice Luminaire, surface, 1x18W/2x18W; 1x36W/2x36W

ELP 33

Order Specification

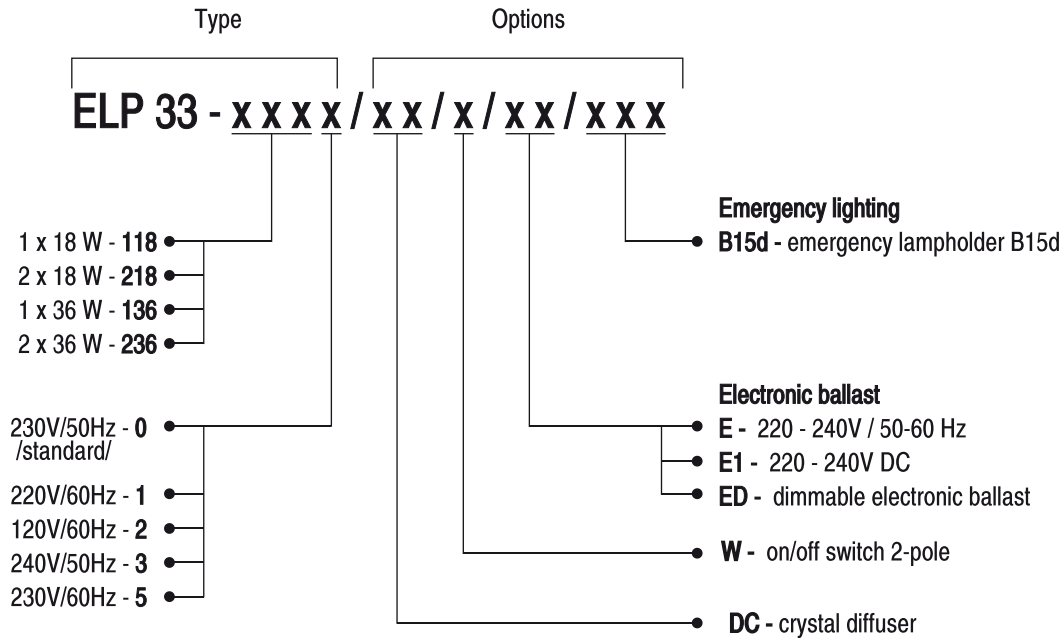

Example of type description

ELP 33 - 2180 light fitting for two fluorescent lamp 18W with socket G13; supply voltage 230V/50Hz;

4.12

Spare parts for ceiling luminaire ELP 33 - 2180

No.	Spare parts	Part-no.
1	Diffuser PC, opal	101 00 33218
2	Lampholder G 13 /4 pcs./	014 00 33218
3	Ballast /2 pcs./	032 00 33218
4	Capacitor	021 00 33218
5	Switch 2-pole	051 00 33218
6	End caps /cpl./	302 00 33218

Spare parts for ceiling luminaire ELP 33 - 2360

No.	Spare parts	Part-no.
1	Diffuser PC, opal	101 00 33236
2	Lampholder G 13 /4 pcs./	014 00 33236
3	Ballast /2 pcs./	032 00 33236
4	Capacitor	021 00 33236
5	Switch 2-pole	051 00 33236
6	End caps /cpl./	302 00 33236