

EXP 03

Explosionproof luminaire, surface
2x18W; 2x36W



IP 66

IP 67

220V-250V
AC/DC

G13

+45°C



Type	Light source	Light source power / lamp base	Weight
EXP 03 - 2180	fluorescent lamp	2 x 18 W / G 13	6,1 kg
EXP 03 - 2360		2 x 36 W / G 13	8,3 kg
EXP 03 - 2180/A3		2 x 18 W / G 13	7,1 kg
EXP 03 - 2360/A3		2 x 36 W / G 13	9,3 kg

Application
hazardous areas zone 2, 22

Approvals authority:

KDB - BARBARA

Protection type

II 3G Ex nA IIC T5 Gc

II 3D Ex t IIIC T60°-65°C IP 66/67 Dc

Insulation class

1

Housing

zinc coated steel, seamless deep drawn,
powder coated white

Diffuser

clear polycarbonate

Lamps (not included)

fluorescent lamp 18W/36W

Electric

flexible wiring, heat resistant up to +105°C

Cable entry

max. 4 cable glands
see drawing A

Mounting

2 welded brackets with
2 mounting holes ø 9 mm

OPTIONS

Stainless
Steel 316L
Housing


Stainless
Steel
Housing

Battery
Backup
System

220V-240V
50Hz-60Hz

3h

SC-Glands
for screen
cable

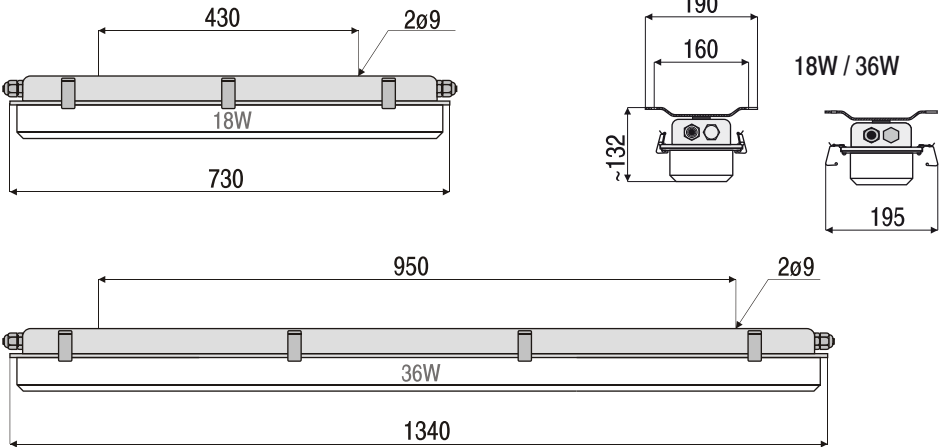

[mm]



Fixing type

