

KJP 27 LED

Mirror luminaire, surface
1x11W



IP 44

220-240V
AC/DC

LED



*socket and switch are optional equipment.

Type	Wattage	Light source	Weight	Light flux	Equivalent
KJP 27-MLED220/111/...	1 x 11 W	LED panel	2,0 kg	1 x 1250 lm	1x14W (T5); 1x18W (T8)


Application
cabins, shower rooms, toilets,
accomodation areas
Approvals
according to the rules of relevant
classification societies, additional IEC

Housing
zinc coated steel, powder coated white
Diffuser
PC, opal
Cable entry
2 inlets, cable max ø 11 mm

Electric
flexible wiring, heat resistant up to
+105°C
Mounting
2 mounting holes, ø 6 mm

OPTIONS

120V
AC/DC

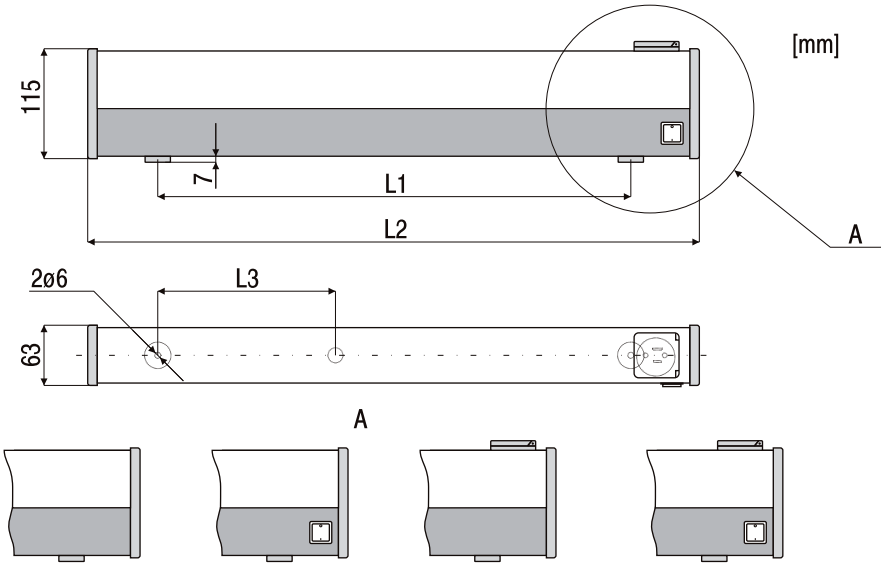


Type	L1	L2	L3
KJP 27 1x11W LED	495	640	170



Mirror luminaire, surface 1x11W

KJP 27 LED

Order Specification

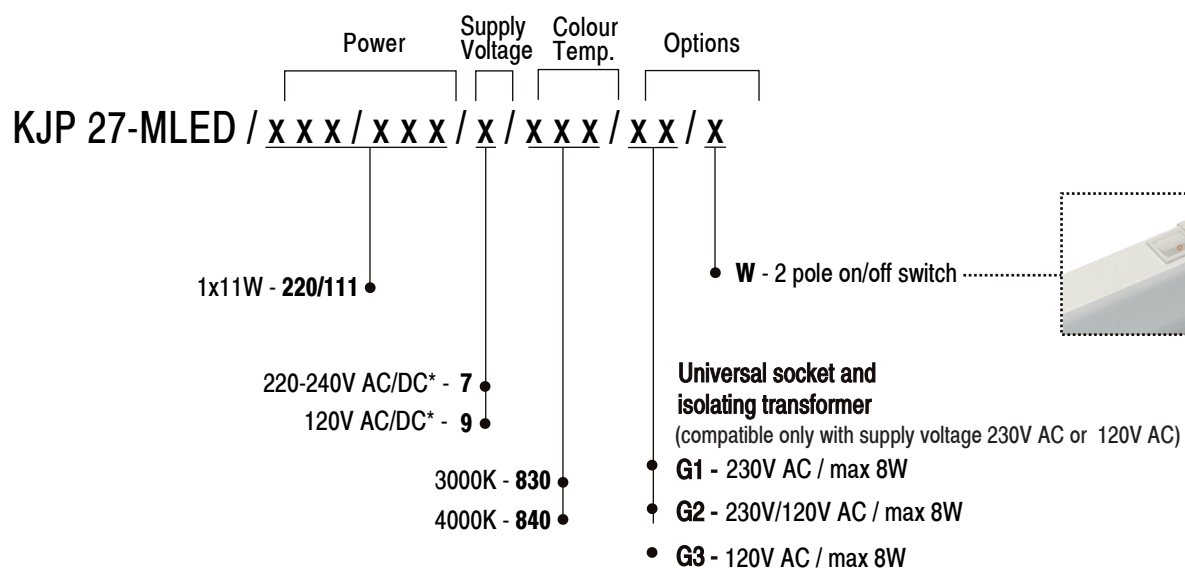

* supply voltage must be 230V AC or 120V AC when G1,G2,G3 is ordered

Example of type description

KJP 27 - MLED/220/111/7/830/G3/W - light fitting with LED panel 1x11W; supply voltage 230V AC colour temperature 3000K;universal socket 120V AC; 2 pole switch