


IP 44

230V
50Hz

G13

G24d-3

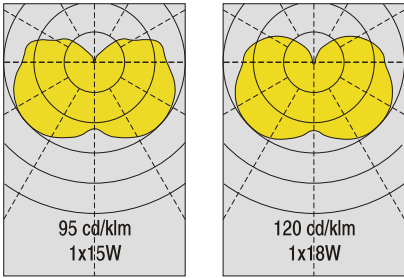

Type	Light source	Light source power / lamp base	Weight
KJP 27 - 1150	fluorescent lamp	1 x 15 W / G 13	1,8 kg
KJP 27 - 1180		1 x 18 W / G 13	2,0 kg
KJP 27 - 1260	tubular compact fluorescent lamp	1 x 26 W / G24d3	2,2 kg

Application
cabins, shower rooms, toilets,
accomodation areas
Approvals
according to the rules of relevant
classification societies, additional IEC

Housing
zinc coated steel, powder coated white
Diffuser
PC, opal
Lamps (not included)
tubular compact fluorescent lamp,
fluorescent lamp
Cable entry
2 inlets, cable max ø 11 mm

Electric
flexible wiring, heat resistant up to
+105°C
Mounting
2 mounting holes, ø 6 mm
Electrical connection
see finish section

4.13

OPTIONS



220-230V
60Hz

120V
60Hz


240V
50Hz

Electronic Ballast

220-240V
AC/DC

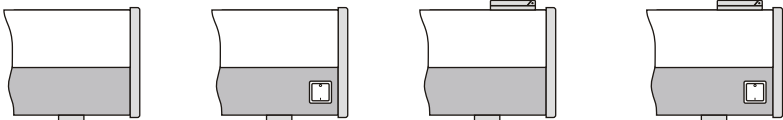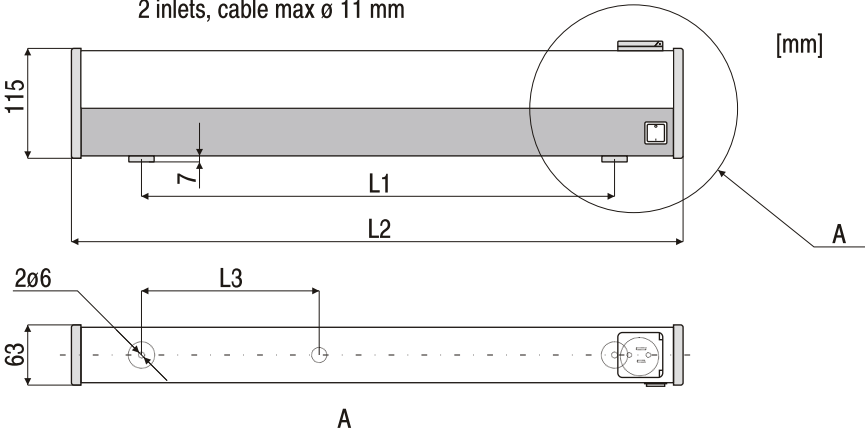


Type	L1	L2	L3
KJP 27 1x26W	168	320	45
KJP 27 1x15W	360	500	200
KJP 27 1x18W	495	640	170



Mirror Luminaire, surface 1x15W/1x18W/1x26W

KJP 27

Order Specification

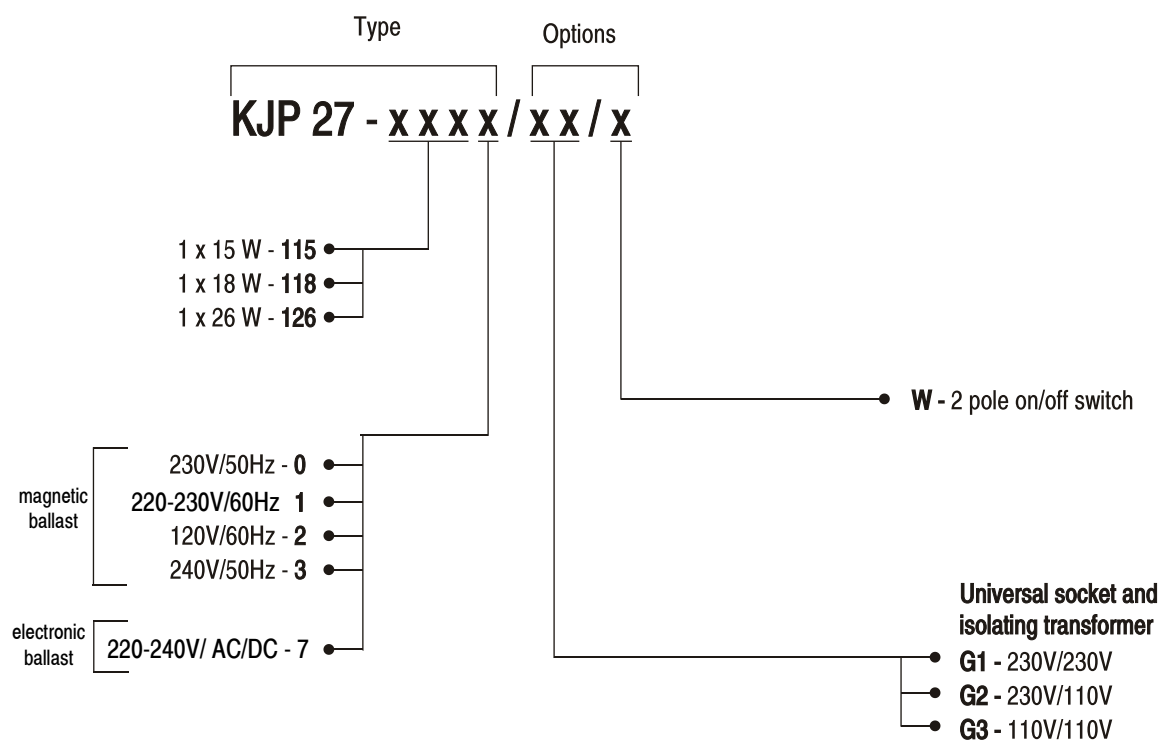

Example of type description

KJP 27 - 1180/G2 light fitting for one fluorescent lamp 18W with socket G13; supply voltage 230V/50Hz; universal socket - 230V and 110V; isolating transformer - 230V/110V

4.14