



IP 20

230V
50Hz

G23



Type	Code	Light source	Light source power / lamp base	Weight
KJP 40 - 1050	640 - 105	tubular compact fluorescent lamp	1 x 5 W / G 23	0,8 kg
KJP 40 - 1070	640 - 107		1 x 7 W / G 23	0,9 kg

Applications
cabins
Approvals
according to the rules of relevant classification societies, additional IEC
Housing
zinc coated steel, powder coated white

Diffuser
polycarbonate, opal
Lamps (not included)
tubular compact fluorescent lamp 5/7W
Electric
flexible wiring , heat resistant up to 105°C,
switch 2-pole

Connections
plug and sockets /Wieland GST/
Mounting
4 mounting holes,ø 4 mm,
cut out 190 x70 mm
Electrical connection
see finish section

3.16


OPTIONS


220V
60Hz

230V
60Hz


120V
60Hz

240V
50Hz

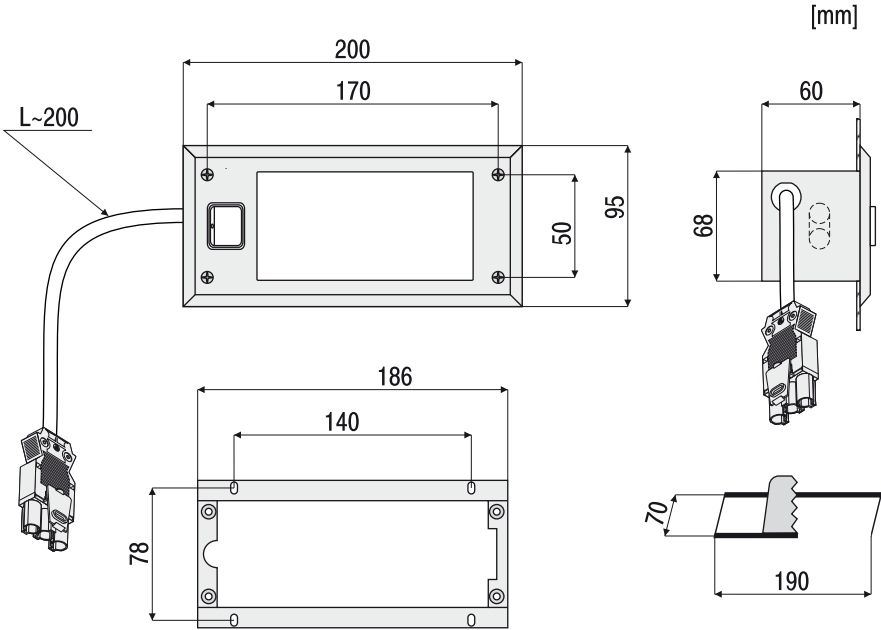



Order Specification

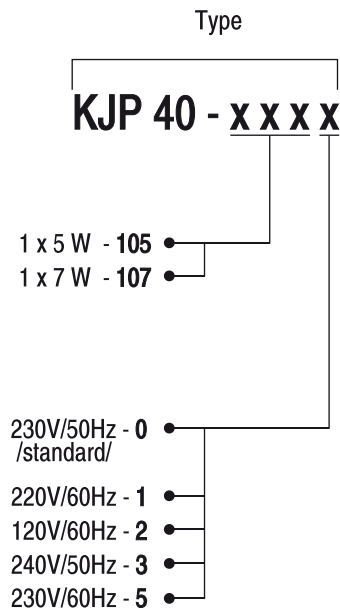

Example of type description

KJP 40 - 1070 light fitting for tubular compact fluorescent lamp 7W with socket G23; supply voltage 230V/50Hz;

3.17

Spare parts for berth light KJP 40 - 1070

No.	Spare parts	Part-no.
1	Diffuser PC, opal	101 00 40107
2	Lampholder G 23	011 00 40107
3	Ballast	031 00 40107
4	Switch 2-pole	051 00 40107