



IP 30

220-240V
AC/DC

LED



* switch is standard equipment


Type	Wattage	Light Source	Weight	Light flux	Equivalent
KJP 41-MLED/106	1 x 6 W	LED	2,5 KG	960 lm (3000K)	1x15W (Comp.)

Application
cabins
Approvals
according to the rules of relevant
classification societies, additional IEC
Housing
zinc coated steel, powder coated white

Diffuser
polycarbonate opal
Electric
halogen free flexible wiring,
heat resistant up to +180°C,
switch 2 pole.


Cable entry
Plug and Socket (GST)
Mounting
2 mounting holes, $\varnothing$ 5.5 mm

5.19

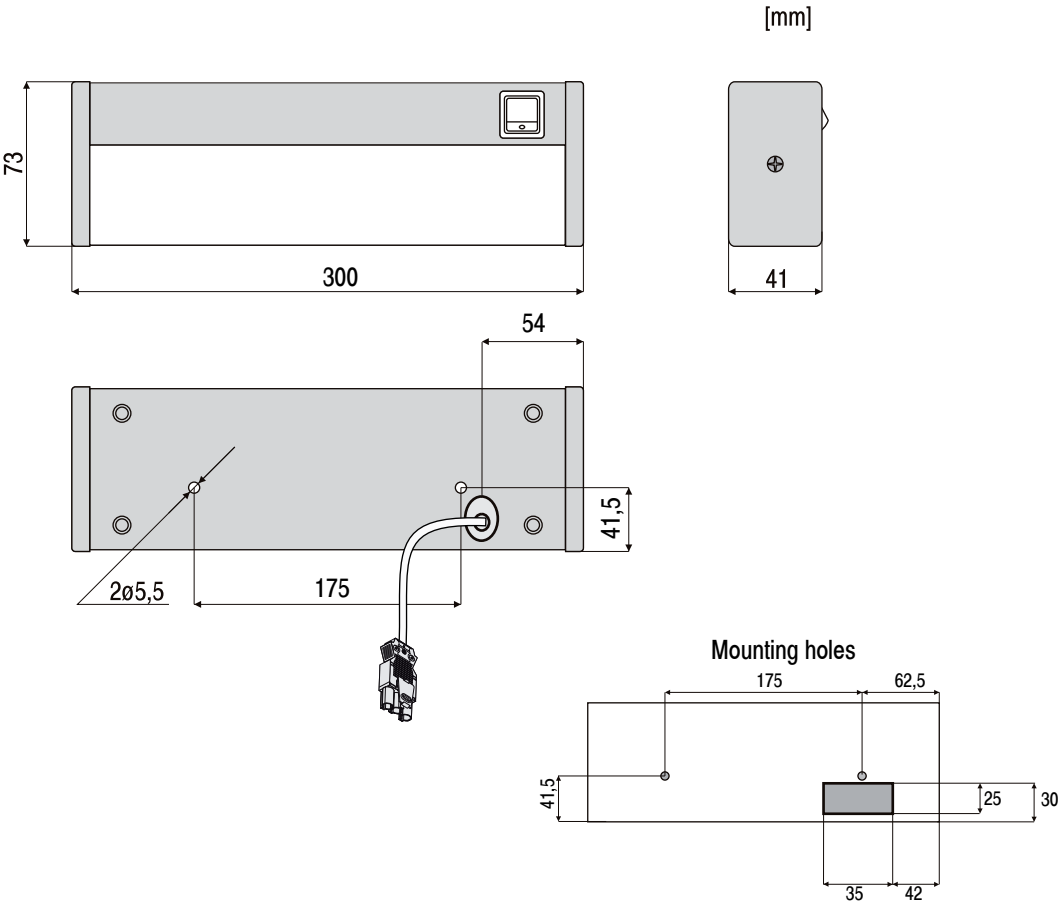



Order Specification

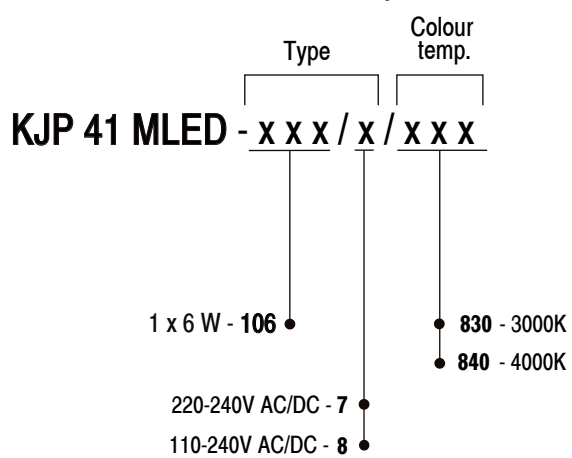

Example of type description

KJP 41-MLED/107/7/830 - light fitting with LED source 1x6W; supply voltage 220-240V AC/DC; colour temperature 3000 K.