



Coldroom Luminaire, surface 2x11W/4x11W LED

KZP 61 MLED



IP 55

220-240V
50-60 Hz

LED

-30°C

Type	Light source	Light source power	Weight
KZP 61-220/211/MLED	LED	2x11W	4,2 kg
KZP 61-240/411/MLED		4x11W	6,3 kg

Application

coldroom, refrigerated areas, freezing rooms

Approvals

according to the rules of relevant classification societies, additional IEC

Baseplate

stainless steel

Ambient temp.

- 30°C to + 40°C

Diffuser

polycarbonate, clear

Gasket

silicone rubber

Electric

flexible wiring, heat resistant up to +105°C

Cable entry

2 plastic cable glands M 20
cable max. $\varnothing$ 13 mm

Mounting


6 or 8 mounting holes, $\varnothing$ 5 mm

Electrical connection

see finish section

2.22

[mm]

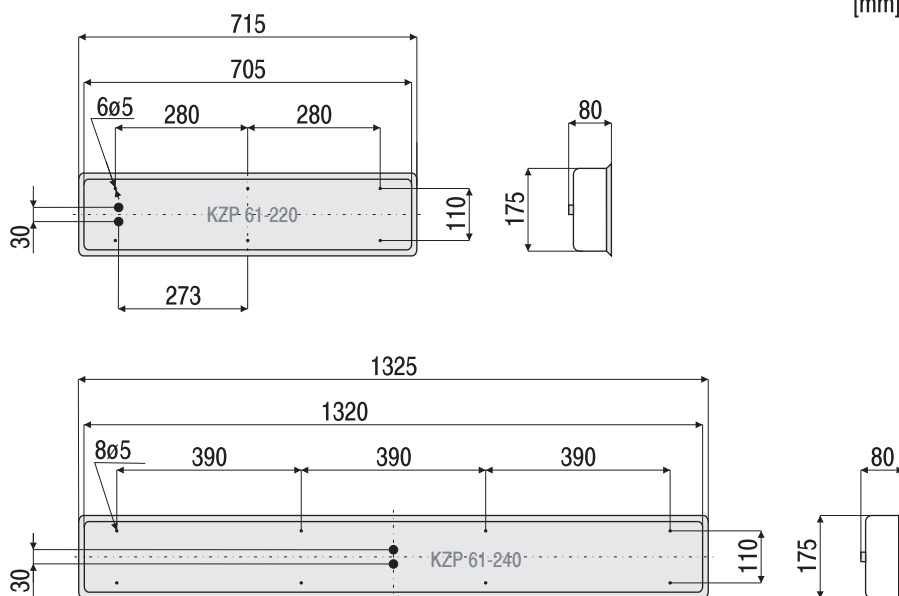


OPTIONS

110V-240V
AC/DC

24V
DC



Order Specification

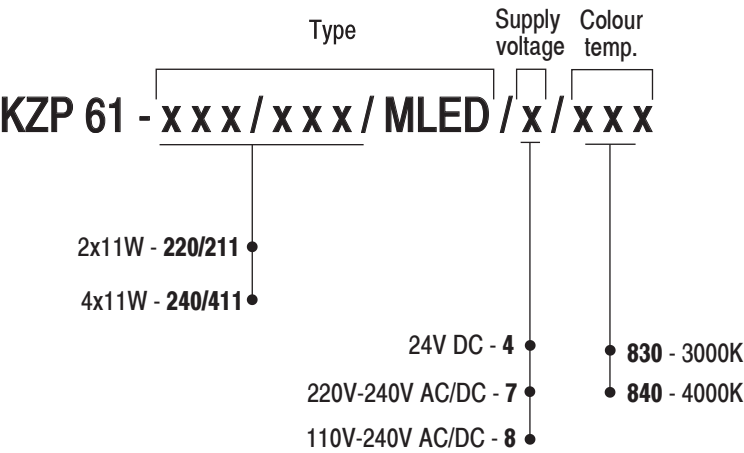

Example of type description
KZP 61-220/211/MLED/7/830 - light fitting with LED source; 2x11W; colour temp. 3000K; supply voltage 220V-240V AC/DC.