



IP 67

230V
50Hz

G24x-2

G24x-3

LED E27



full-moon version

Type	Light source	Ballast	Light source power / lamp base	Weight
SLP 98 - 118...	tubular compact fluorescent lamp	magnetic	1 x 18 W / G24d-2	1,8 kg
SLP 98 - 126...	tubular compact fluorescent lamp		1 x 26 W / G24d-3	2,0 kg
SLP 98 - 118...	tubular compact fluorescent lamp	electronic	1 x 18 W / G24q-2	1,8 kg
SLP 98 - 126...	tubular compact fluorescent lamp		1 x 26 W / G24q-3	2,0 kg
SLP 98 - 160...	LED	x	1x 10 W / LED(E27)	2,0 kg

Approvals
according to the rules of relevant classification societies, additional IEC
Housing
stainless steel, powder coated white
Diffuser
polycarbonate, opal

Lamps (not included)
tubular compact fluorescent lamp 18W/26W
LED lamp max 10W (E27)
Electric
flexible wiring
heat resistant up to +105°C

Cable entry
2 cable glands PG 13,5
cable max ø 12 mm
Mounting
4 mounting holes ø 6 mm
directly on wall or ceiling

OPTIONS

220V-230V
60Hz

230V
60Hz

120V
60Hz


240V
50Hz

Electronic
Ballast



220V-240V
AC/DC

110V-240V
AC/DC

Emergency
Lampholder
B15d

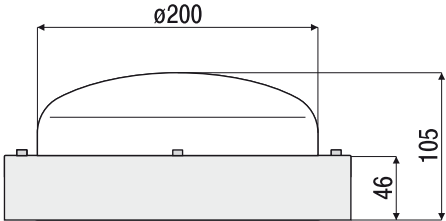


[mm]

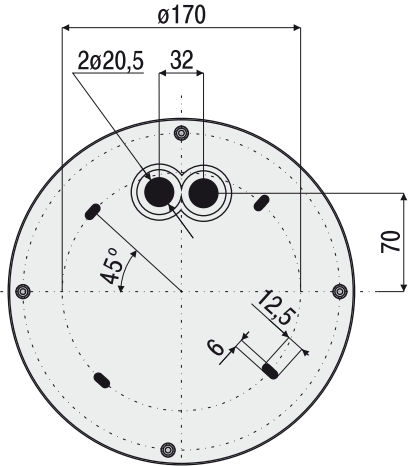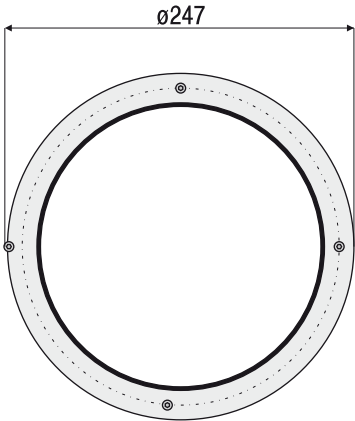



Order Specification

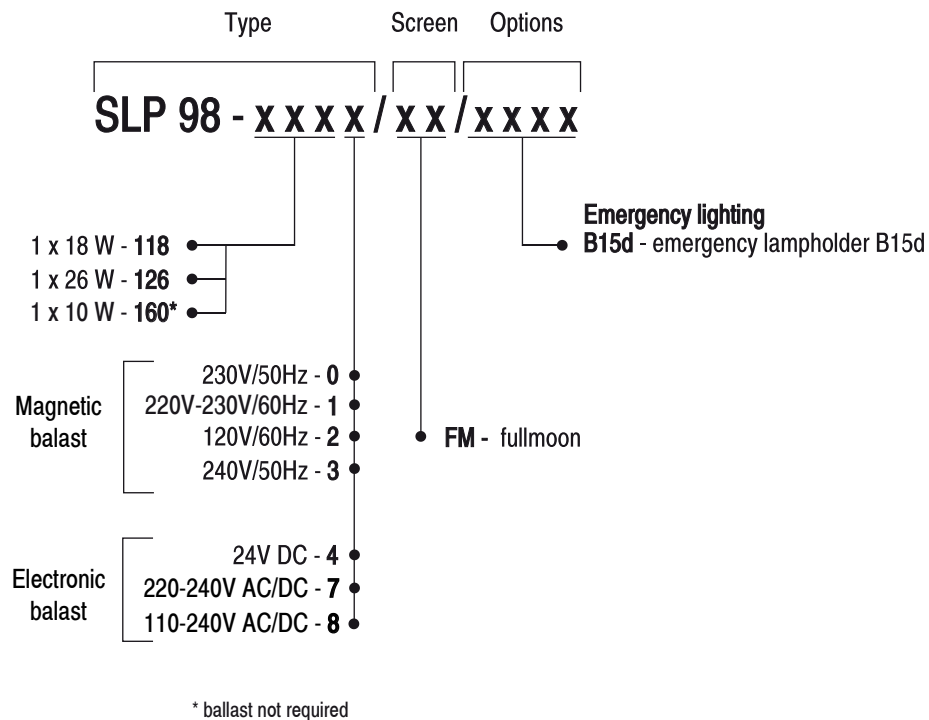

Example of type description

SLP 98 - 1180 light fitting for one tubular compact fluorescent lamp 18W with socket G24d-2; supply voltage 230V/50Hz