





Floodlight, max 1x400W HPS/MH

STP 76 - 1400



IP 67

E 40



Type	Light source	Light source power	Lampholder type	Weight
STP 76 - 1400	sodium or metal-halide lamp	1 x 250 W or 1 x 400 W	E 40	7,7 kg

Application
decks, holds, industrial areas, etc.
Approvals
according to the rules of relevant classification societies, additional IEC
Housing
stainless steel seamless deep drawn, powder coated white
Diffuser
safety glass
Reflector
aluminium anodized

Lamps (not included)
high pressure (HPS) sodium lamp, metal halide (MH) lamp 250W/400W
Electric
230V, flexible wiring, high temperature resistant
Cable entry
junction box, 1 cable glands brass, M 24x1.5, with earthing insert

Mounting
adjustable bracket, stainless steel, 4 mounting holes, ø10 mm and ø14 mm
Electrical connection
see finish section
Remark
ballast unit VGP 76 - . . . has to be ordered separately

1.03

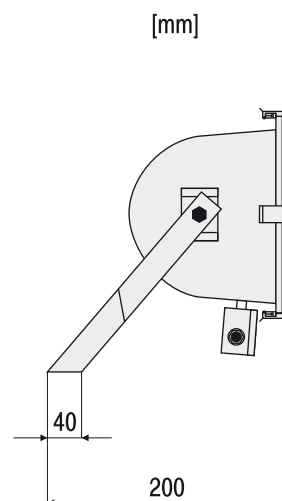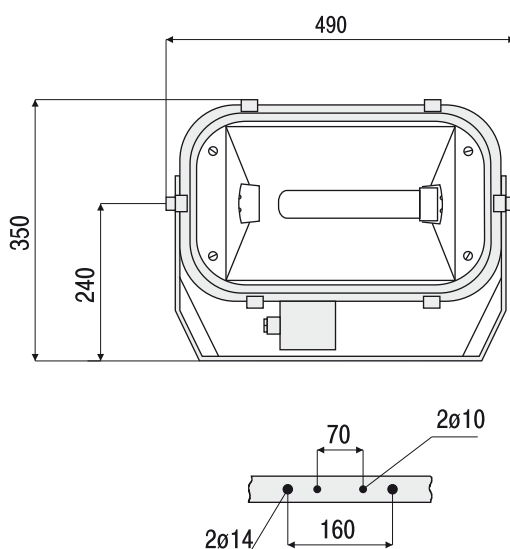

OPTIONS

Narrow Beam Reflector

SC-Glands for screen cable