




Watertight luminaire, 12W LED

TLP 53 MLED

IP 67

220V-240V
AC/DC

LED

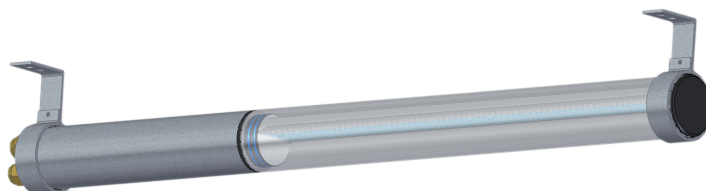

* product visualization

Type	Light source	Light source power / colour temp.	Lumens (source)	Weight
TLP 53-MLED980/112/.../830	LED panel	12 W / 3000K	1790 lm	5,5 kg
TLP 53-MLED980/112/.../840	LED panel	12 W / 4000K	1840 lm	5,5 kg

Application
open decks

Approvals

according to the rules of relevant
classification societies, additional IEC

Housing

clear PMMA tube

stainless steel tube for electronic comp.

Electric


flexible wiring, heat
resistant up to 105°C

Cable entry


max 2 cable glands

Mounting

2 fixing brackets, stainless steel

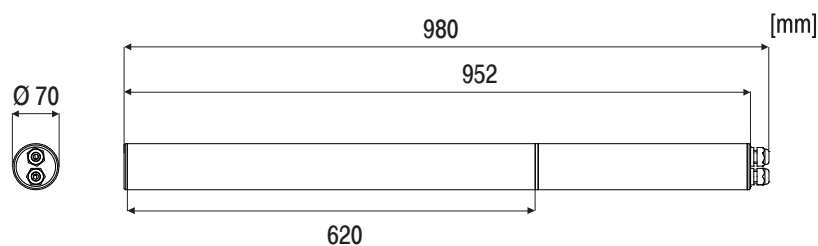

Fixing brackets

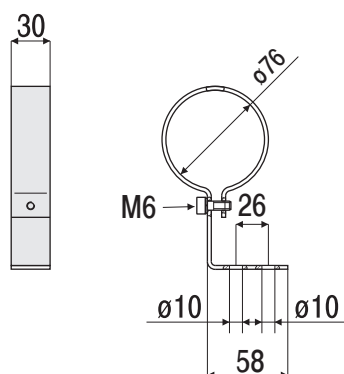


OPTIONS

110V
AC

12V / 24V
DC



Order Specification

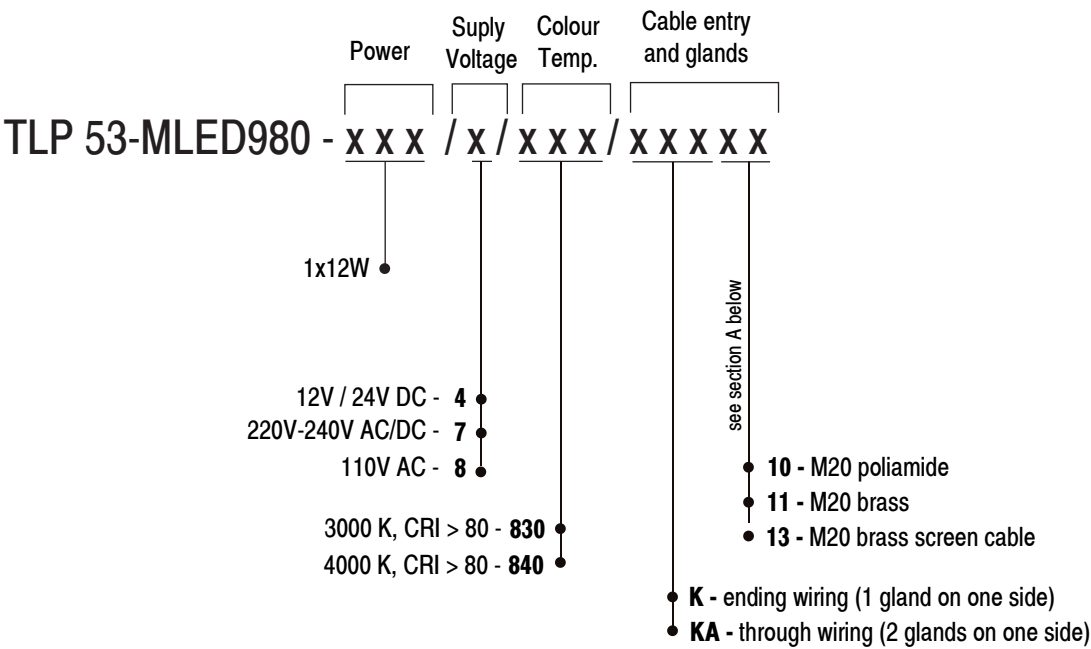

Example of type description

TLP 53 MLED - 112/7/840/KA10/ - light fitting for LED light source 12W, colour temp. 4000K, CRI>80; through wiring with poliamide M20 glands.

A. Cable entry

M 20		
Polyamide	Brass	Brass SC
Cable dia. 6-12 /mm/	Cable dia. 8-14,5 /mm/	Cable dia. 7-12,5 /mm/
10	11	13