




Watertight luminaire, surface 2x11W / 4x11W / 4x6W / 8x6W LED

TLP 67 MLED

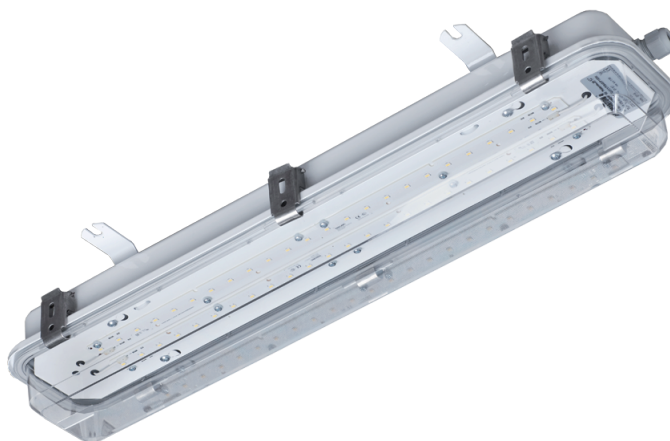

IP 66

IP 67

LED

+45°C

220-240V
AC/DC

Type	Wattage	Light source	Weight	Light flux	Equivalent
TLP 67-MLED220/211/...	2 x 11 W	LED	3,9 kg	2 x 1250 lm	2x14W (T5); 2x18W (T8)
TLP 67-MLED240/411/...	4 x 11 W		4,2 kg	4 x 1250 lm	2x28W (T5); 2x36W (T8)
TLP 67-MLED220/406/...	4 x 6 W (24V DC)		3,5 kg	4 x 770 lm	2x14W (T5); 2x18W (T8)
TLP 67-MLED240/806/...	8 x 6 W (24V DC)		4,0 kg	8 x 770 lm	2x28W (T5); 2x36W (T8)

Application

Watertight luminaire for decks, engine rooms, holds, storage yards, working spaces, industrial areas, etc.

Approvals

according to the rules of relevant classification societies, additional IEC

Housing

zinc coated steel or stainless steel
powder coated white

Diffuser

polycarbonate, clear

Electric

flexible wiring, heat resistant
up to +105°C

Cable entry





max 4 cable glands, see drawing A

Mounting

See drawing B

2.08

[mm]

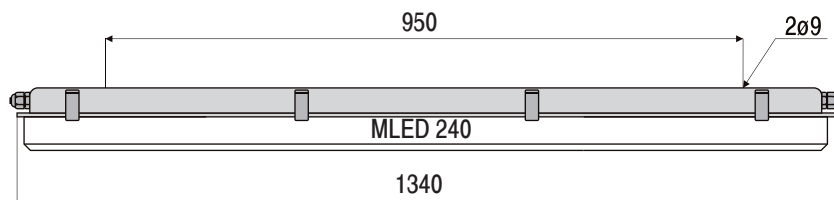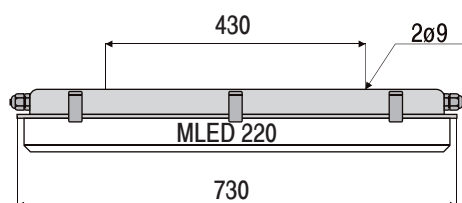

OPTIONS

110V-240V
AC/DC

24V
DC

Battery
Backup
System

220V-240V
50Hz-60Hz

3H

Stainless
Steel
Housing

Stainless
Steel 316L
Housing



Order Specification

Housing

TLP 67 X - MLED

zinc coated steel - Z

stainless steel - S

stainless steel 316L - S316

Power

xxx/xxx

2 x 11 W - 220/211

4 x 11 W - 240/411

4 x 6 W *- 220/406

8 x 6 W *- 240/806

Supply Voltage

x

24V DC - 4

220V-240V AC/DC - 7

110V-240V AC/DC - 8

Colour temp.

xxx

830 - 3000K

840 - 4000K

Cable entry and glands

xxxxx

See drawing A

K

P

KA

PA

PAK

Fixing type

xx

See drawing B

H - mounting bolt kit

W - bracket welded for version „S”, fixed for „Z”

WD - bracket welded to housing

Emergency lighting

xx

A3 - battery backup system 3h


*only for 24V DC

2.09

Example of type description

TLP 67S-MLED220/211/7/830/P11/W - stainless steel light fitting with LED panels (2x11W), power supply 220-240V AC/DC; light color temp.: 3000K; through wiring (2 brass glands M20); fixing - two „w” brackets.

A. Cable entry

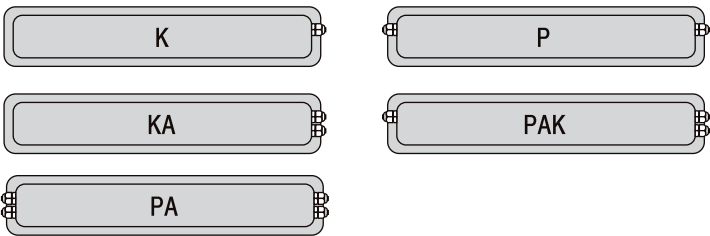






M 20			M 25		
Polyamide	Brass	Brass SC	Polyamide	Brass	Brass SC
Cable dia. 6-12 /mm/	Cable dia. 8-14,5 /mm/	Cable dia. 7-12,5 /mm/	Cable dia. 11-17 /mm/	Cable dia. 9-17 /mm/	Cable dia. 9-17 /mm/
10	11	13	20	21	23



Watertight luminaire, surface 2x11W / 4x11W / 4x6W / 8x6W LED

TLP 67 MLED

B. Fixing type

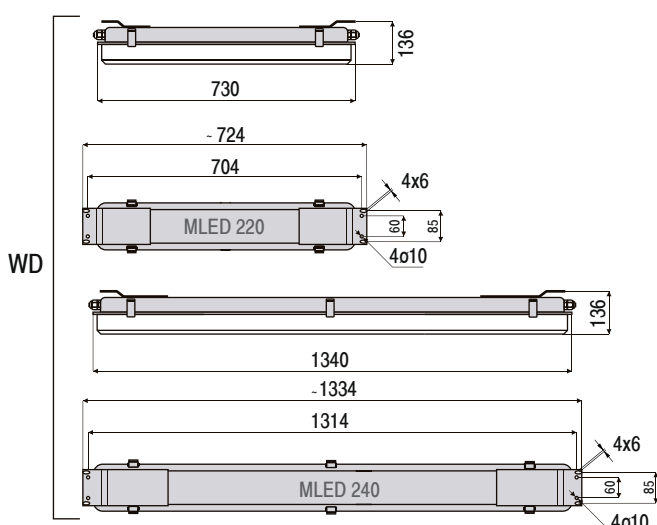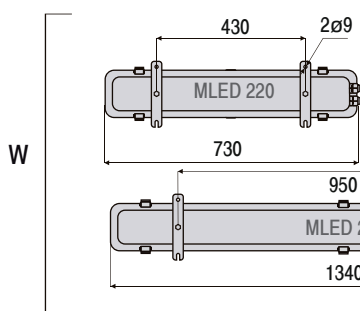

2.10