



Ballast Unit for HPS/MH Floodlight 1x250W/1x400W/2x250W/2x400W

VGP 76

IP 67

230V-250V
50Hz

230V-250V
60Hz



Type		Light source	Light source power	Weight
230V - 250V / 50Hz	230V - 250V / 60Hz			
VGP 76 - 1250	VGP 76 - 1251	sodium or metal-halide lamp	1 x 250 W	10,6 kg
VGP 76 - 1400	VGP 76 - 1401		1 x 400 W	10,8 kg
VGP 76 - 2250	VGP 76 - 2251		2 x 250 W	18,4 kg
VGP 76 - 2400	VGP 76 - 2401		2 x 400 W	19,4 kg

Application

decks and holds, industrial areas

Approvals

according to the rules of
relevant classification societies, additional
IEC

Housing

stainless steel, powder coated white

Electric

flexible wiring, heat
resistant up to +105°C,

Cable entry

max. 4 cable glands, brass, M 24x1.5,
with earthing insert

Mounting



4 mounting holes, $\varnothing 10\text{mm}$

Electrical connection

see finish section

Remarks

floodlight has to be ordered
separately

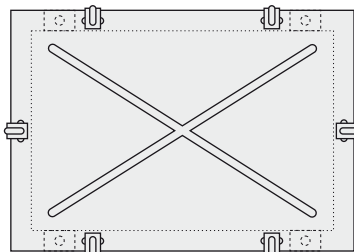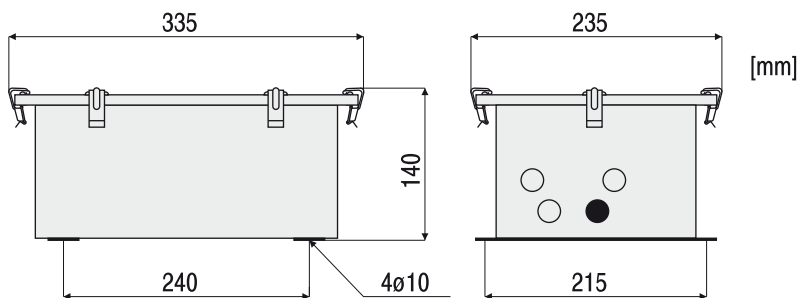

OPTIONS

SC-Glands
for screen
cable

1.07