





Kitchen Luminaire, surface 2x18W/2x36W


KLP 61



IP 55

230V
50Hz

G13



Type	Light source	Light source power / lamp base	Weight
KLP 61 - 2180	fluorescent lamp	2 x 18 W / G 13	4,6 kg
KLP 61 - 2360		2 x 36 W / G 13	6,7 kg

Application

galleys, kitchen, pantries, provision rooms

Approvals

according to the rules of relevant classification societies, additional IEC

Baseplate

stainless steel

Diffuser

polycarbonate, clear

Gasket

silicone rubber

Lamps (not included)

fluorescent lamp 18W / 36W

Electric

flexible wiring, heat

resistant up to +105°C

Cable entry

2 plastic cable glands M 20,
cable max ø 12 mm

Mounting



6 or 8 mounting holes, ø 5 mm

Electrical connection

see finish section

2.08

[mm]

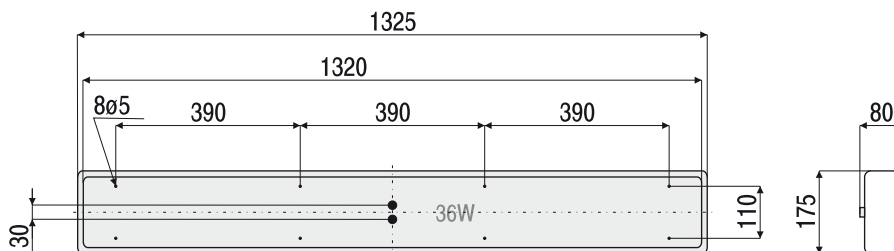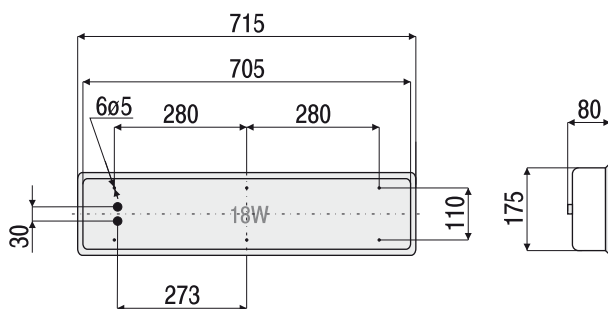

OPTIONS

220V
60Hz

230V
60Hz

120V
60Hz

240V
50Hz

24V DC

Electronic
Ballast

220V-240V
50Hz-60Hz


220V-240V
DC

Battery
Backup
System


220V-240V
50Hz-60Hz

1h or 3h

Emergency
Lampholder
B15d



Order Specification

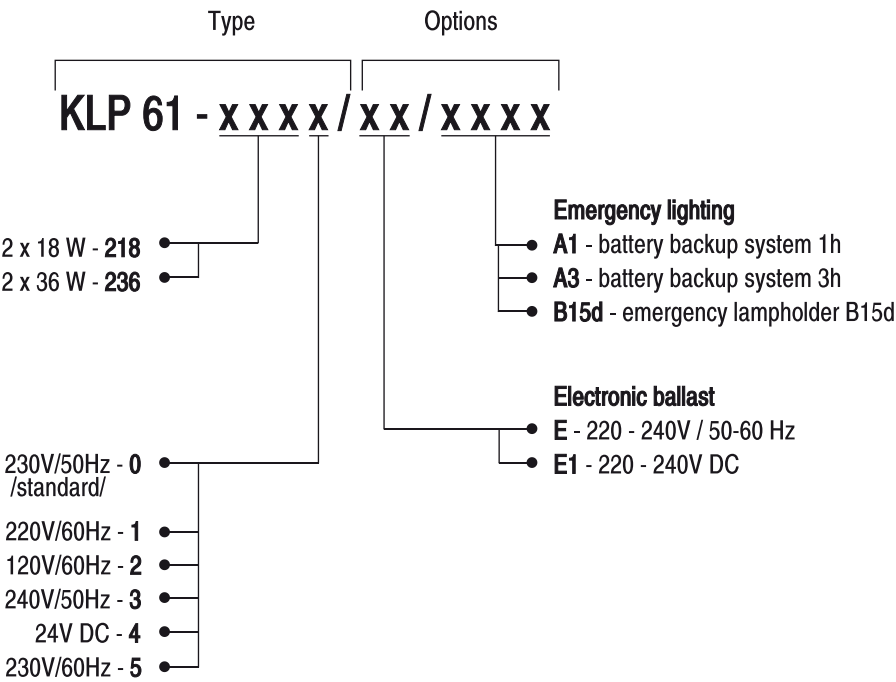

Example of type description
KLP 61 - 2360 light fitting for two fluorescent lamp 36W with socket G13; supply voltage 230V/50Hz;

2.09

Spare parts for kitchen luminaire KLP 61 - 2180

No.	Spare parts	Part-no.
1	Diffuser PC	101 00 61218
2	Diffuser mounting kit	302 00 61218
3	Silicone gasket	601 00 61218
4	Lampholder G 13 /4 pcs./	014 00 61218
5	Ballast /2 pcs./	032 00 61218
6	Capacitor	021 00 61218
7	Cable gland /2 pcs./	042 00 61218

Spare parts for kitchen luminaire KLP 61 - 2360

No.	Spare parts	Part-no.
1	Diffuser PC	101 00 61236
2	Diffuser mounting kit	302 00 61236
3	Silicone gasket	601 00 61236
4	Lampholder G 13 /4 pcs./	014 00 61236
5	Ballast /2 pcs./	032 00 61236
6	Capacitor	021 00 61236
7	Cable gland /2 pcs./	042 00 61236