

8 SHOOT BOLT SINGLE ACTION WATERTIGHT DOOR 15m

8 Clip single action watertight door.

Door manufactured from 10mm cover plate, suitably stiffened with weld on 60 x 60 x 10mm door stiffeners and fitted with a 40 x 25mm section perimeter seal. Secured by 8in shoot bolts linked together and operated by a central hand wheel.

Door tested to **15m** head of water.
Door available with shock rating.




8 SHOOT BOLT SINGLE ACTION WATERTIGHT DOOR 15m


NAVY- SHOCK RATED WATERTIGHT DOOR 15 METERS

GENERAL NOTES:
NO ALTERATIONS ALLOWED UNLESS
AGREED BY MCGEOCH MARINE LIMITED.
DO NOT SCALE FROM DRAWINGS.

ITEM	DESCRIPTION OF ITEM
01	LINK BARS
02	HARD WHEEL
03	ARTICULATED HINGE
04	HEAVY DUTY BUSH/BOLT
05	50mm X 50mm X 5mm CHANNEL MATERIAL
06	STEEL MATERIAL
07	RUBBER SEAL
08	CLIP
09	CONTROL DRIVE MECHANISM
10	DOOR BY PNEUMATIC DRIVE X 50mm X 10mm ANGLE
11	COMING (OPTIONAL)
12	HS-BAR (OPTIONAL)

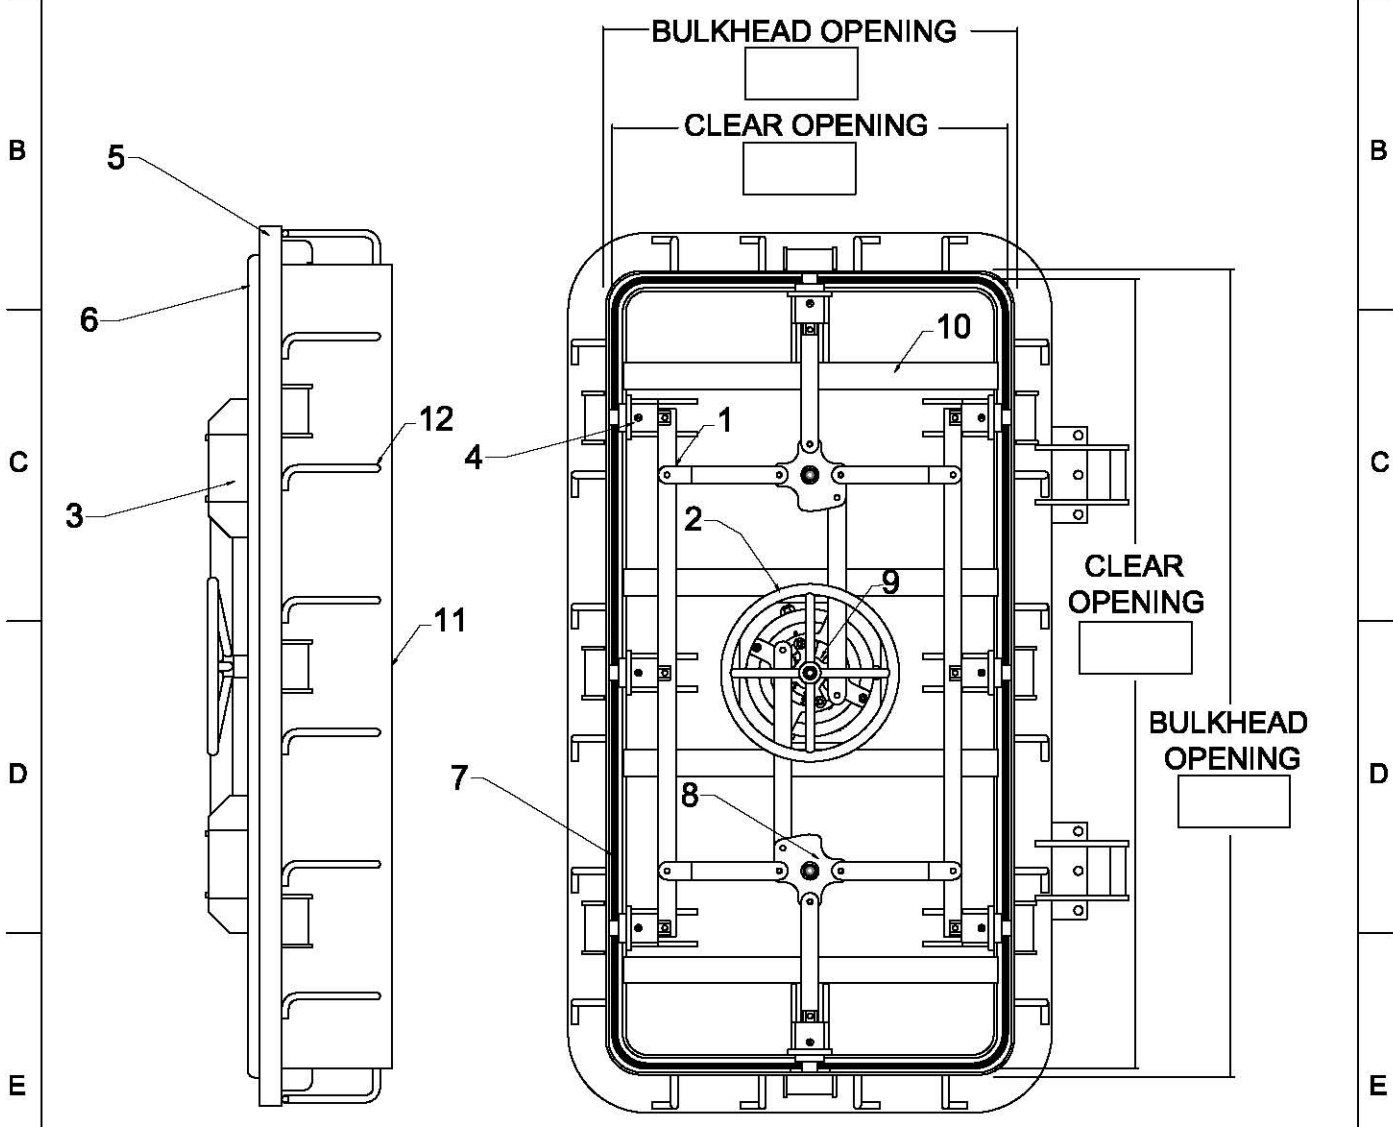

MATERIAL REQUIREMENTS	
MATERIAL	PLEASE TICK
STAINLESS STEEL	<input type="checkbox"/>
MILD STEEL	<input type="checkbox"/>
OTHER (PLEASE SPECIFY)	



BULKHEAD DIM:

C/OOPENING DIM:

WATERTIGHT DOOR

McGEOCH MARINE Ltd
36 Lozenbank Quadrant, Govan
Glasgow G51 3HZ
e-mail: sales@m-m-l.com
Tel: +44 141 445 5363

THESE DESIGNS AND PLANS ARE COPYRIGHT AND ARE NOT TO BE USED OR REPRODUCED WHOLLY OR IN PART OR TO BE USED IN ANY PROJECT WITHOUT THE WRITTEN PERMISSION OF MCGEOCH MARINE LTD.