





Pressure Watertight Luminaire, 1x18W/36W

TLP 53



IP 68

**230V
50Hz**

G13

Type	Light source	Light source power / lamp base	Weight
TLP 53 - 1180	fluorescent lamp	1 x 18 W / G 13	3,7 kg
TLP 53 - 1360		1 x 36 W / G 13	4,7 kg

Application

decks

Approvals

according to the rules of relevant classification societies, additional IEC

Protection class

IP 68 h20

Housing

clear polycarbonate tube

End caps

polycarbonate

Lamps (not included)

fluorescent lamp 18W/36W

Electric

flexible wiring, heat resistant up to 105°C

Cable entry

2 cable glands, M 20, cable Ø 11 - 14,5 mm


Mounting

2 fixing brackets, stainless steel


Electrical connection

see finish section

2.06

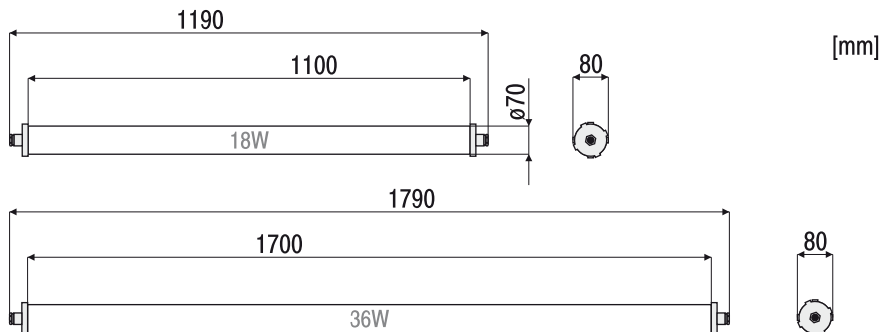

Fixing brackets

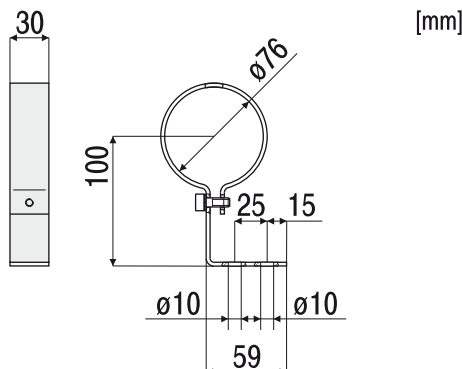

OPTIONS

**220V
60Hz**

**230V
60Hz**

**120V
60Hz**

**240V
50Hz**

24V DC

Electronic Ballast


220V-240V
50Hz-60Hz

220V-240V
DC

SC-Glands for screen cable



Order Specification

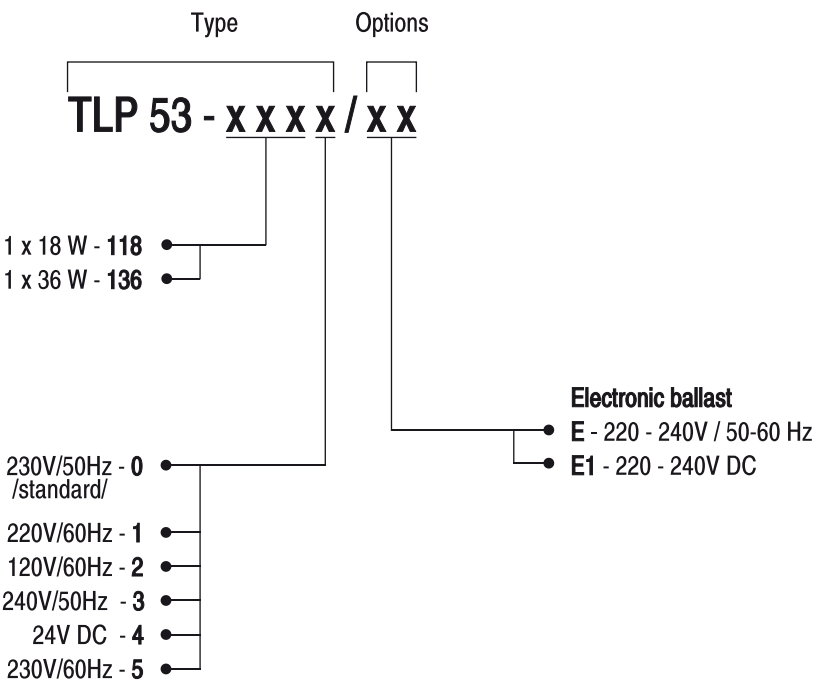

Example of type description

TLP 53 - 1182 light fitting for one fluorescent lamp 18W with socket G13; supply voltage 120V/60Hz;

2.07

Spare parts for watertight luminaire TLP 53 - 1180

No.	Spare parts	Part-no.
1	Lampholder G 13 /2 pcs./	012 00 53118
2	Ballast	031 00 53118
3	Capacitor	021 00 53118
4	End caps /cpl./	302 00 53118
5	Cable gland /2 pcs./	042 00 53118
6	Fixing brackets /2 pcs./	402 00 53118

Spare parts for watertight luminaire TLP 53 - 1360

No.	Spare parts	Part-no.
1	Lampholder G 13 /2 pcs./	012 00 53136
2	Ballast	031 00 53136
3	Capacitor	021 00 53136
4	End caps /cpl./	302 00 53136
5	Cable gland /2 pcs./	042 00 53136
6	Fixing brackets /2 pcs./	402 00 53136